

SERVO MOTOR 115U3B300BAAEA115190




Definition

Type	Unimotor FM	
Frame Size (mm)	115	
Voltage	U	U - 400V
Magnet type	3	3 - Standard
Frame Length	B	
Speed (min-1)	30	3000
Brake	0	Unbraked (0)
Connection type	B	B - Power and Signal 90° rotatable
Output shaft	A	with key
Feedback device code	AE	AE - Resolver (Size 52)
Inertia & thermistor	A	A - Standard + PTC thermistor
PCD	115	115 (FF 115 / 95)
Shaft Diameter	190	19j6 x 40.0 .
Fan box	-	
Insulation class	F	
UL Motor / UL Stator	UL Motor / UL Stator	

Nominal characteristics

Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (N.m)	7.40	Stall Current (A)	4.60
Rated Torque (N.m)	6.70	Rated Current (A)	4.2
Motor Peak Torque (N.m)	22.20		
Rated Power (kW)	2.10	Kt (Nm/A)	1.60
Winding Thermal Time Constant (s)	109	Ke (V/kmin-1)	98.00
Number of Poles	6	R (ph-ph) (Ohm)	4.37
Maximum Cogging (N.m)	0.1	L (ph-ph) (mH)	25.19
Inertia (kg.cm²)	7.70	Product mass	8.63
Ingress Protection Level (IP)	IP65		

Torque / speed graph

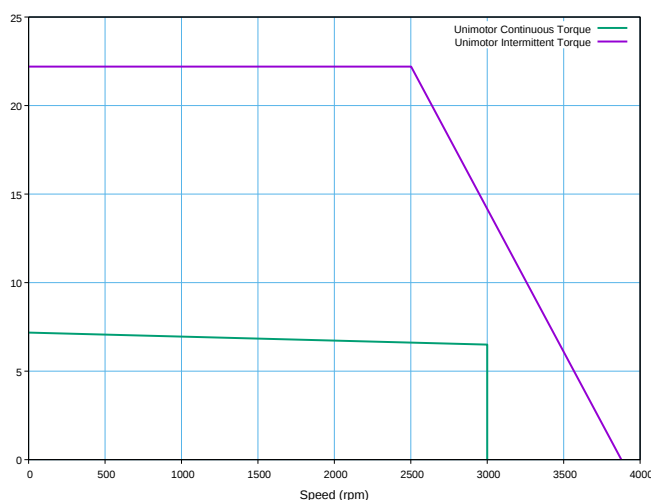


Configured characteristics

Motor Ambient Temperature (°C)	40
Drive Fsw (kHz)	8
Derating Factor	0.97
Stall Torque with Derating Factor (N.m)	7.18
Nominal Torque after Derating (N.m)	6.50
Peak Torque with Derating Factor (N.m)	22.20

SERVO MOTOR 115U3B300BAAEA115190 - Unimotor FM 115U3B300BAAEA115190

Motor (° & mm)

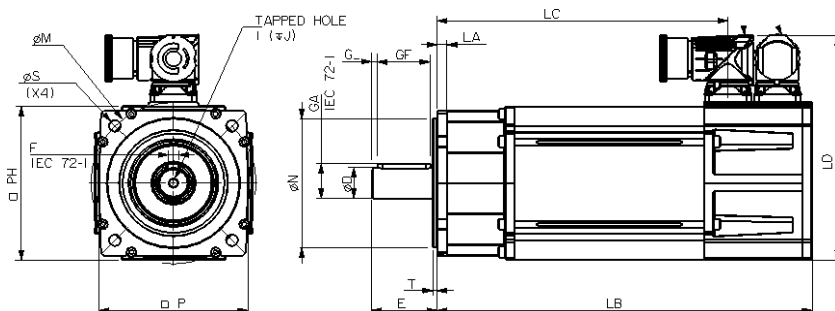


LB	Total length	253.60
LB1		
LC	Power connector position	223.80
LJ		
LA	Flange thickness	10.1
T	Register Length	2.8
N	Register Diameter	95.0
LD	Power connector overall height	156.50
LD1		
P	Flange Square	105.0
S	Fixing Hole Diameter	10.0
M	Fixing hole PCD	115
PH	Motor Housing Width	115
D	Shaft Diameter	19j6
E	Shaft Length	40.0
GA	Key Height	21.5
GF	Key Length	32.0
G	Key to Shaft End	3.6
F	Key Width	6
I	Tapped Hole Thread Size	M6x1
J	Tapped Hole Depth	17.0
	Mounting Bolt	M8

Motor electrical interface

Feedback device code : AE - Resolver (Size 52)
= '03' Cable : SR

Connection type :
Conductors size :

B - Power and Signal 90° rotatable
4G1 (A)



- 1 - Excit
- 2 - Excit_inv
- 3 - COS
- 4 - COS_inv
- 5 - SIN
- 6 - SIN_inv
- 7 - CTP
- 8 - CTP

Screen

