

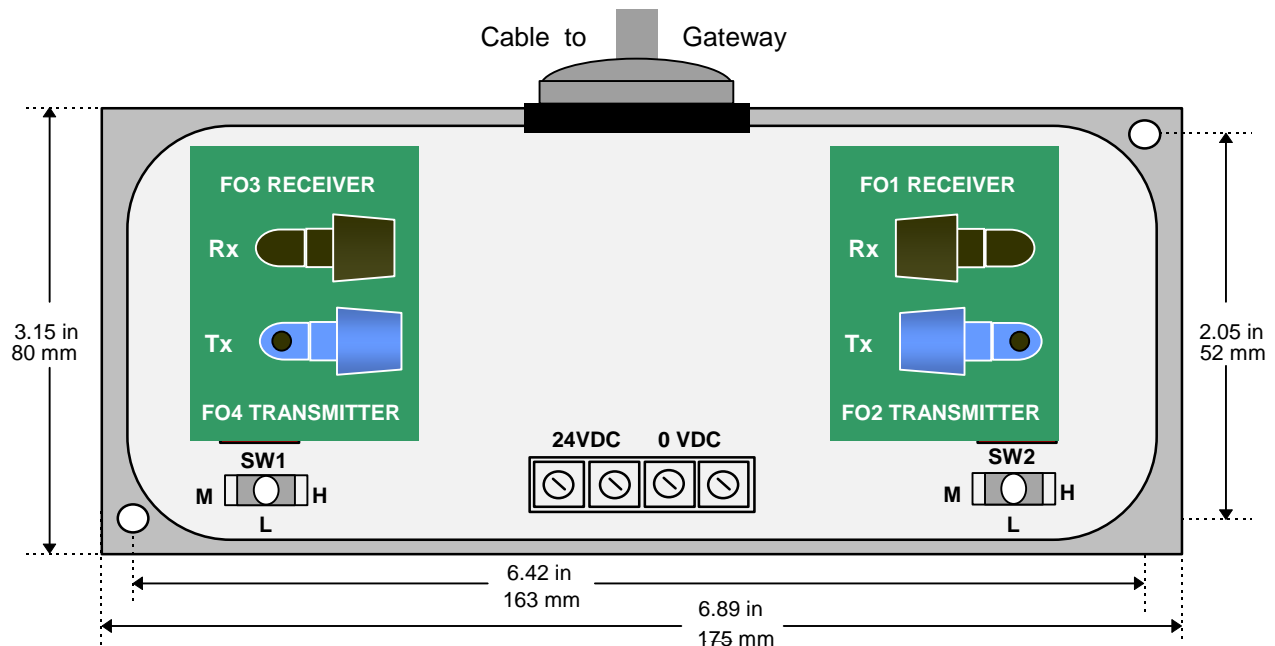
## L5206-2-01 LINK Gateway Repeater

### GENERAL DESCRIPTION

The L5206-2-01 LINK Gateway Repeater receives and retransmits data between the LINK fiber optic network and all LINK Gateways. The gateway is connected via a shielded cable (CM350901) to the repeater's DB25 connector. The L5206-2-01 behaves identically to a simple repeater when the gateway is absent. When a gateway is connected to the repeater, network data is routed through the gateway to include it in the LINK network ring.

The *LINK* Repeater is housed in a NEMA 4 enclosure suitable for mounting outside equipment enclosures or in unprotected environments.

The L5206-2-01 supports the transmission of two *LINK* channels. Either a primary and secondary channel pair, or two discrete primary channels may be retransmitted.



### TECHNICAL SPECIFICATIONS

#### Environmental

Operating temperature	0°C to 50°C
Storage temperature	-10 °C to +70 °C
Humidity	85% R.H. in a dry, non-condensing environment
Enclosure Rating	NEMA 4, IP-66 (with appropriate waterproof 1/2 inch NPT fittings)

#### Supply

Supply Voltage	20 to 28 VDC (24VDC nominal)
Current Consumption	55 mA maximum
Power Dissipation	1.5 Watts maximum
Power Terminals	14 to 22 gauge (0.5 to 1.5 mm <sup>2</sup> ) wire size

#### Fiber Optic Channels

Connectors	Insert and twist connector. 1000 micron fiber with 2mm acrylic jacket fiber optic cable
Transmission Distance	Selected by toggle switches. SW1 controls FO4 transmitter and SW2 controls FO2 transmitter
LOW (center position)	up to 66 feet (20 meters)
MEDIUM (left position)	66 to 131 feet ( 20 to 40 meters)
HIGH (right position)	131 to 197 feet ( 40 to 60 meters)

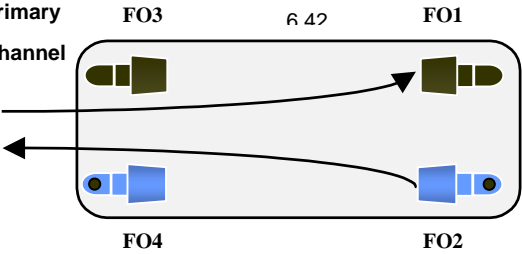
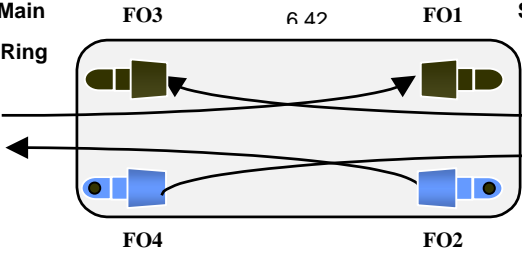
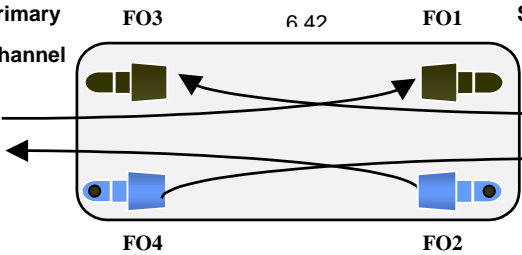
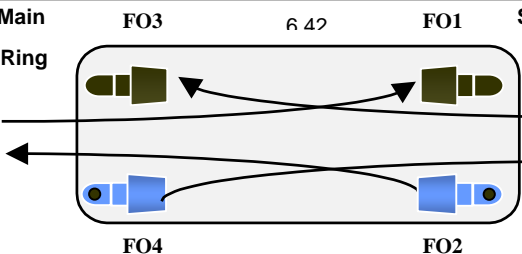
#### Physical

Height	6.89 inches (175 mm)
Width	3.15 inches (80 mm)
Depth	2.32 inches (59 mm)
Weight	1.35 lbs (0.61 kg)

## L5206-2-01 LINK Gateway Repeater

### CONNECTION DIAGRAMS

The fiber optic cable connections for each channel are shown below. Note that the arrow denotes the direction of transmission in the fiber, from transmitter to receiver. Each channel is completely independent and hence, can be used either as a primary or a secondary channel.

<b>Primary Channel</b> 	<b>Network Topology</b>	<b>Effect when gateway is disconnected</b>
	Simple	Network ring is broken
<b>Main Ring</b> 	<b>Network Topology</b>	<b>Effect when gateway is disconnected</b>
	Tapped	Network ring is preserved *
<b>Primary Channel</b> 	<b>Network Topology</b>	<b>Effect when gateway is disconnected</b>
	Redundant	Network ring is preserved
<b>Main Ring</b> 	<b>Network Topology</b>	<b>Effect when gateway is disconnected</b>
	Auxiliary Tapped	Network ring is preserved *

\* NOTE. Losing a fiber optic signal at either receiver breaks both rings.