
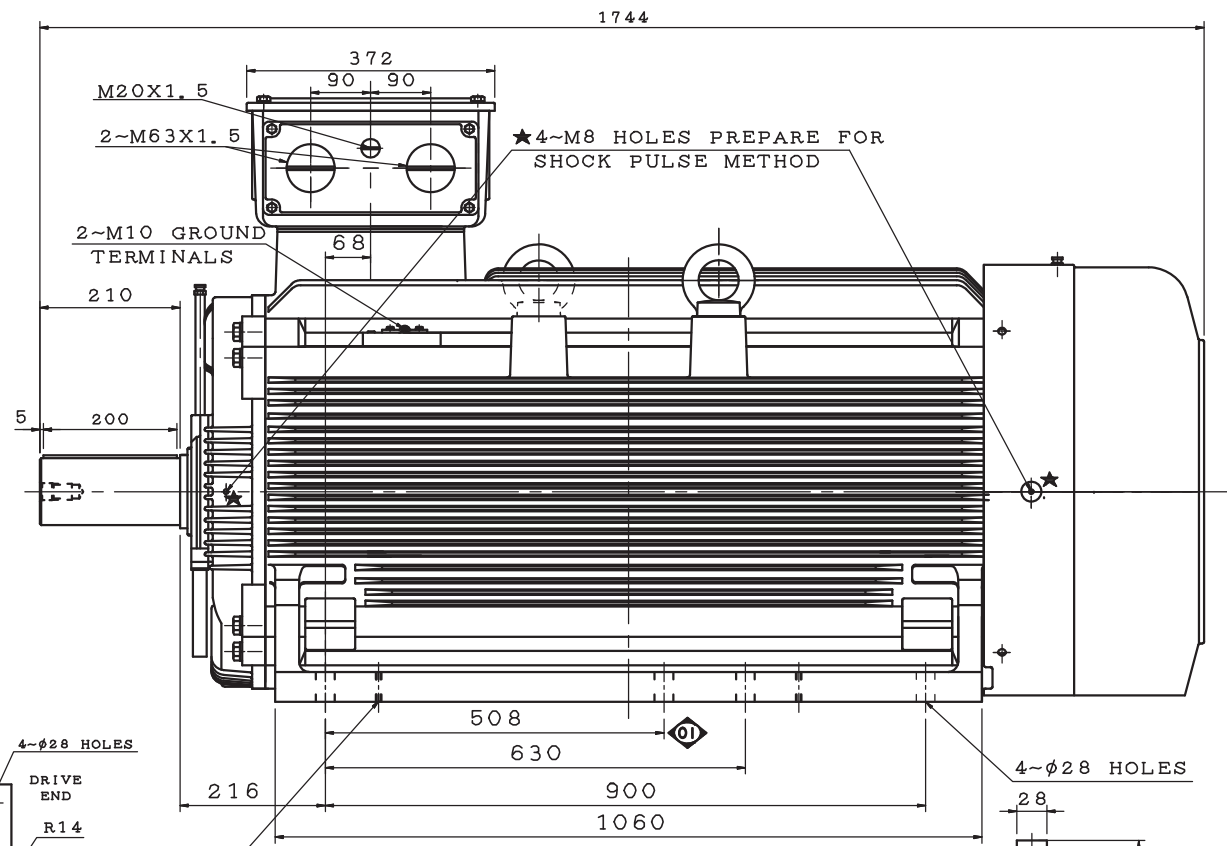



TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	kW.					
AESV3E	422	315	4	CONT.	400/690 460	50/60	1500/1800

TOTALLY ENCLOSED FORCED VENTILATED TYPE, SQUIRREL CAGE ROTOR

PRIMARY & THERMISTOR
T-BOX

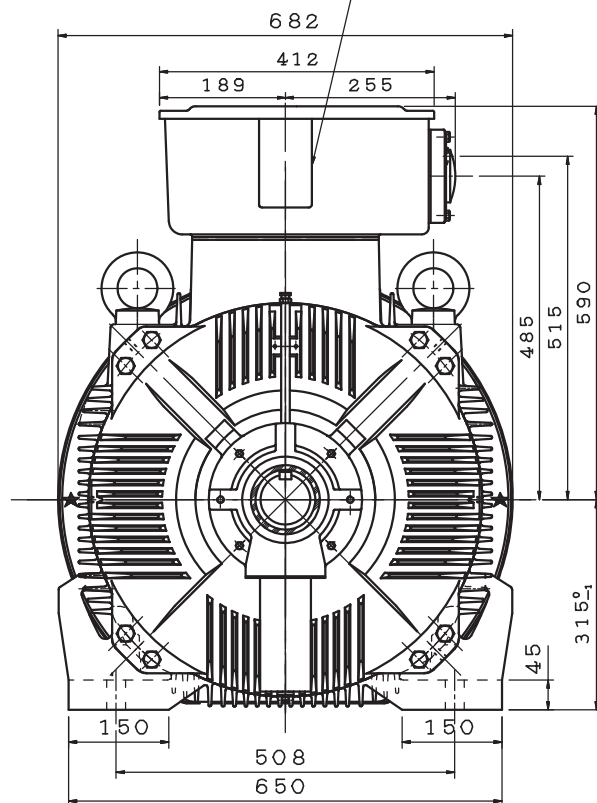

(A) M10 VERTICAL JACKING HOLE, ONE HOLE PER FOOT. (TOTAL 4 HOLES)

SHAFT END
ENLARGED VIEW

NOTE:

1. DIMENSIONS IN MM
2. FRAME NO. 315D
3. F CLASS INSULATION
4. FOR BELT DRIVE
5. ENCLOSURE: IPW55, OUTDOOR SERVICE
6. BEARING NO.: DRIVE END NU322W(NSK)
OPP. DRIVE END 6322/C3
7. WITH THERMISTOR: PTC 150°C 3PCS
8. APPROX WEIGHT: 2100kg
9. CORROSION PROOF
10. WITH OIL SEAL
11. WITH HEXAGON HEND SCREWS, STRENGTH GRADE 8.8
12. WITH NON-SPARKING FAN

TECO

OUTLINE DIMENSIONS

DATE

3-PHASE INDUCTION MOTOR

DWN.	FAN	MAR 19 15
CHKD.	M. ZHU	MAR 19 15
APPD.	J. LIU	MAR 19 15

東元電機股份有限公司
TECO Elec. & Mach. Co., Ltd.

DWG NO.
REV:01

3W040Z714