

contact socket 1mm Hypoboloid

- for all signal insulation bodies ,
- for power plugs size1 8- and 9way

order code: 60.001.11



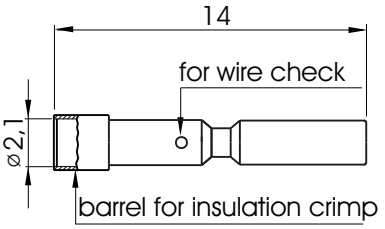

main measurements
contact socket

electrical data

*Nominal current	up to 10 A
contact resistance	< 5 mOhm

material

contact	brass, gold plated

termination

kind of termination	crimp
cross section	0,06 - 1mm²
- for insulation crimp	max insulation Ø 2,1 mm
stripping length	6 mm

mechanical data

mating cycles	> 50
contact retaining forces	> 35 N
plug in - plug out forces	0,8 N - 2,5 N

tools (not included in delievery)

crimping tool	
for 1mm and 2mm contacts	Best.-Nr. CO.201.00
positioner for 1mm contacts	Best.-Nr. CO.003.00
or	
crimping tool with positionierer for 1mm contacts	Best.-Nr. CO.101.00

Copyright 07/2002 by INTERCONTEC Produkt GmbH, Germany.
Alle Rechte im Fall der Patenterteilung oder GM-Eintragung vorbehalten.
Zuwiderhandlungen verpflichten zu Schadenersatz.

Alle Angaben dienen nur zur Information. Vor Verwertung der angegebenen Informationen und Daten muß sich der Anwender über Aktualität und Gültigkeit dieser Ausfertigung rückversichern.
Technische Änderung vorbehalten.

INTERCONTEC Produkt GmbH
Bernriederstraße 15, 94559 Niederwinkling
Tel.: 0049 9962/ 2002-0, Fax: 0049 9962/ 2002-70
E-Mail: info@intercontec.biz
Web: www.intercontec.biz

issue: 05.02.2002/GS changed: 04.06.2002/Fu

* for max. wire cross-section 1 mm²