

Accessories

Connectors and cables

Connection cable M23, 12-pin, straight, shielded (OptoPulse)



Features

- Connection cable shielded with female connector M23, open cable end
- Cable (4x2x0.14 mm²)
- 12 pin version
- Cable coating PVC
- Colour code according to DIN 47100
- UL/CSA certification
- Temperature -40...+85 °C (fixed installation)

Part number


10164705	Connector M23, 12-pin
11100430	Connection cable 5 m shielded with female connector M23, 12-pin
11100431	Connection cable 10 m shielded with female connector M23, 12-pin
11100408	Connection cable 2 m shielded with female connector M23, 12-pin
11095302	Connection cable 1 m shielded with female connector M23, 12-pin

Suitable for


EIL580-B, EIL580-B - Option 6301, EIL580-SC, EIL580-SQ, EIL580-SY, EIL580-T, EIL580-T - Option 6301, ExEIL580-B, ExEIL580-SC, ExEIL580-SY, ExEIL580-T

Terminal assignment

Connector M23	Core colour
Pin 1	pink
Pin 2	–
Pin 3	blue
Pin 4	red
Pin 5	green
Pin 6	yellow
Pin 7	–
Pin 8	grey
Pin 9	–
Pin 10	white
Pin 11	–
Pin 12	brown
Housing	Shield



Dimensions

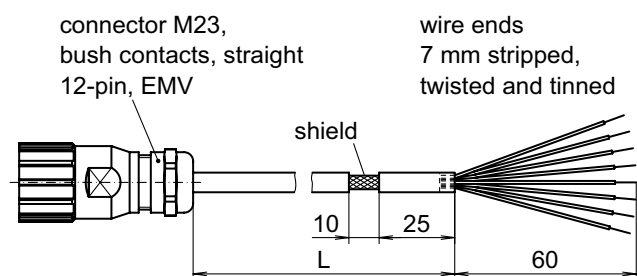

Z01533