

# Communication Module


## PROFIBUS Card

### Interface, LED Indication

Product Insert

**R912006458**  
**Edition 01**

#### PROFIBUS Interface

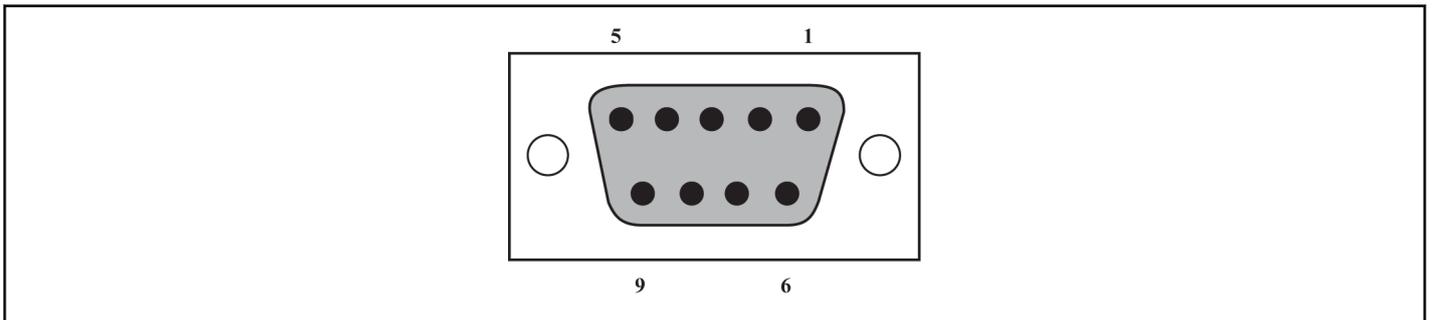


PROFIBUS DB9 interface

Pin	Terminal sign	Terminal name	Function description
1	NC	–	Reserved
2	NC	–	Reserved
3	PROFIBUS_B	PROFIBUS terminal_B	PROFIBUS data cable B
4	RTS	Request for signal sending	–
5	GND	Power-	–
6	Vcc	Power+	–
7	NC	–	Reserved
8	PROFIBUS_A	PROFIBUS terminal_A	PROFIBUS data cable A
9	NC	–	Reserved

Pin definition of PROFIBUS DB9 interface

PROFIBUS Card LED

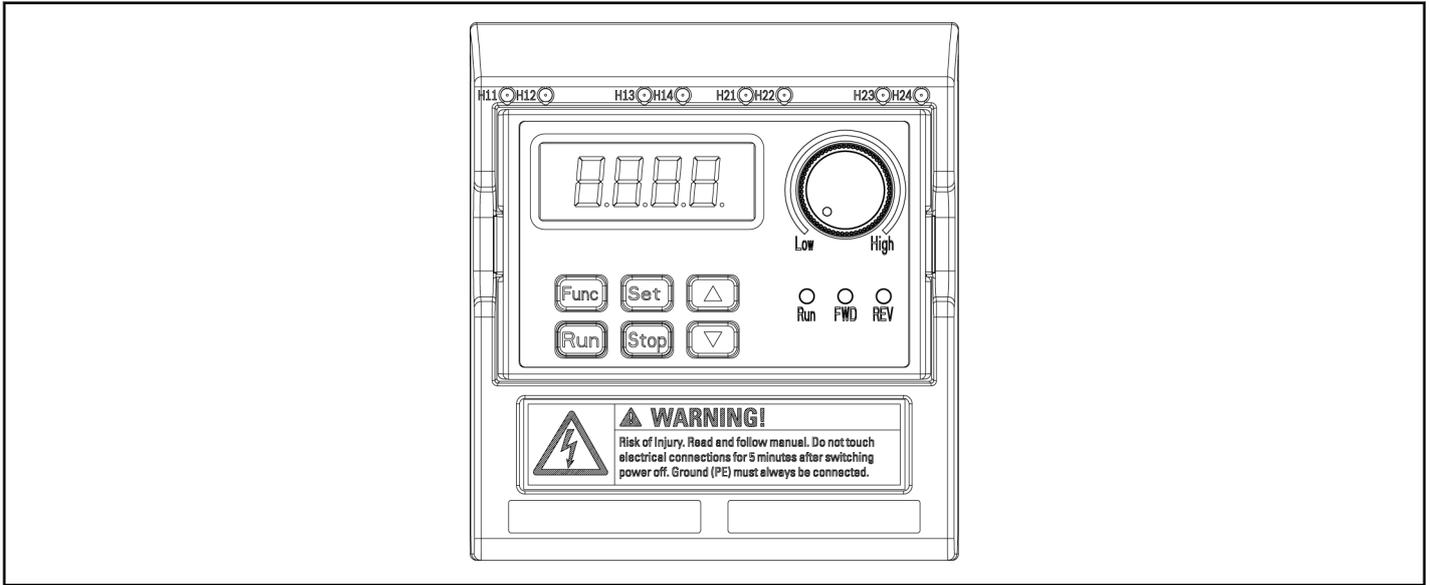

PROFIBUS card LED

LED	Color	Function	Status	Description
H11/H21 <sup>①</sup>	Green	PROFIBUS card configuration status	Fast blinking 0.4 s per cycle	Data exchanging
			ON	Communication established PROFIBUS card successfully parameterized and configured => Everything OK
H12/H22 <sup>①</sup>	Red	PROFIBUS card error indication	OFF	PROFIBUS card OK
			Slow Blinking 1 s per cycle	PROFIBUS card error

PROFIBUS card LED

**Note<sup>①</sup>:**

- ▶ H11 and H12 are available when the PROFIBUS card is installed on the left card slot
- ▶ H21 and H22 are available when the PROFIBUS card is installed on the right card slot

Details for PROFIBUS parameter settings and application notes, see **Chapter 14.4 PROFIBUS Protocol in the Operating Instructions.**



**Copyright**

© Bosch Rexroth (Xi'an) Electric Drives and Controls Co., Ltd. 2015  
 This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth (Xi'an) Electric Drives and Controls Co., Ltd. It may not be reproduced or given to third parties without its consent.