

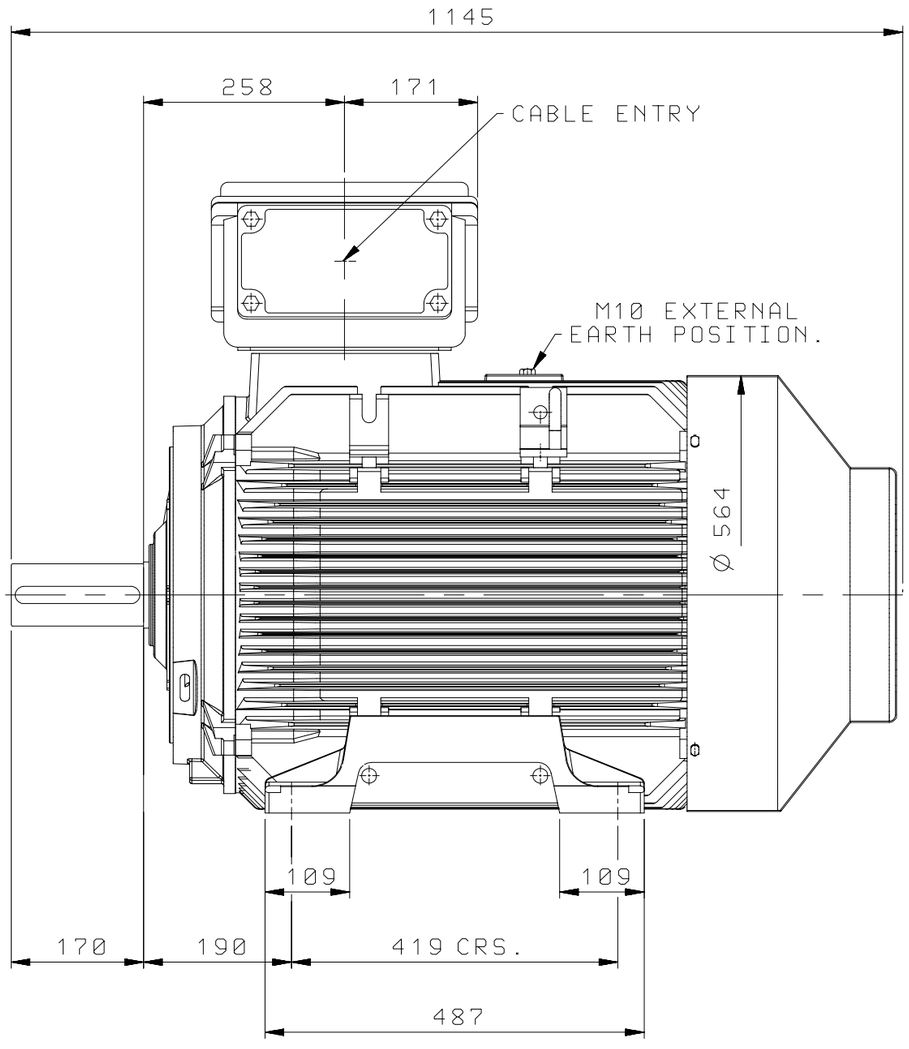


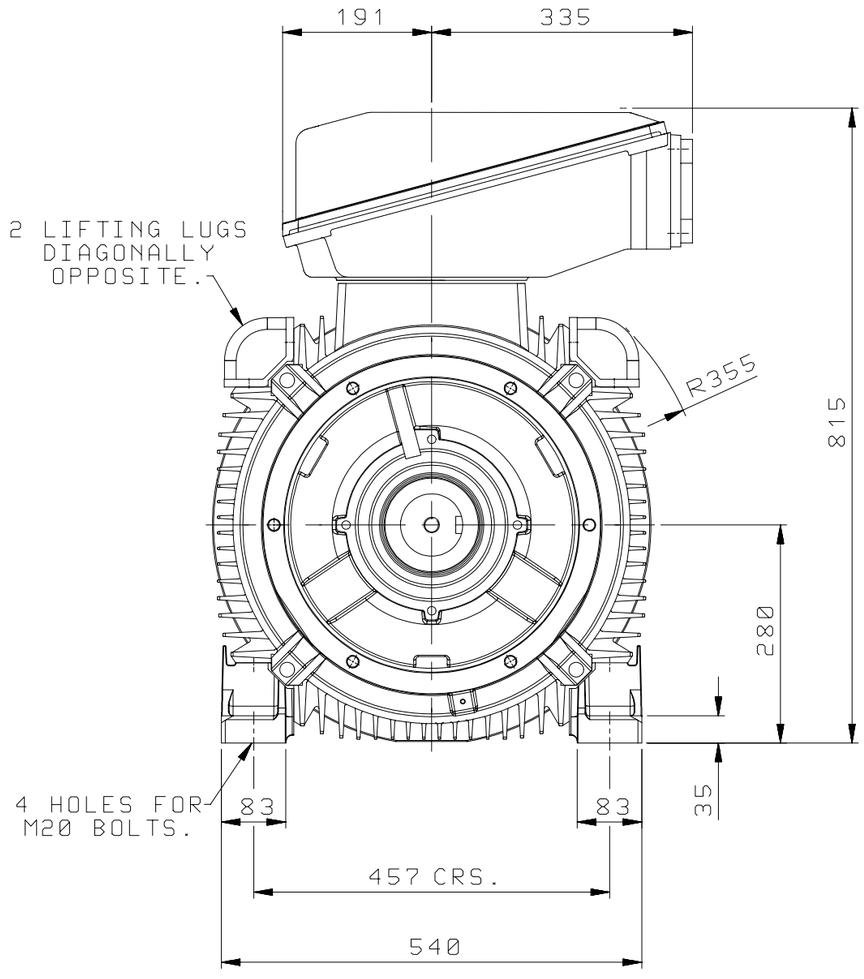

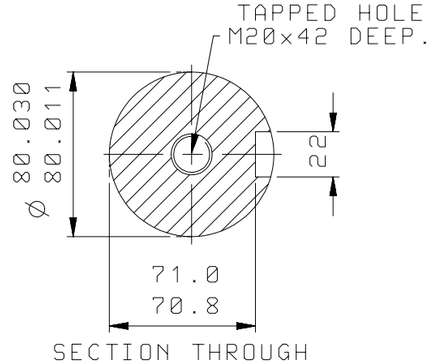

SECTION THROUGH
SHAFT EXTENSION
(SCALE 1:3.)

NOTE:-
TERMINAL BOX CAN BE MOUNTED (LEFT OR RIGHT) BY REFITTING FEET AND LIFTING LUGS 90° IN APPROPRIATE DIRECTIONS. CABLE ENTRY CAN BE SUPPLIED IN ANY ONE OF FOUR POSITIONS AT 90° INTERVALS.

CUSTOMER			
ORDER No.			
PART No.			
OUR ORDER No.			
FRAME SIZE			
KW.		RPM.	
Hz		PHASE	
VOLTS		POLES	
BRGS.	DE.	DE.	NDE.
MOTOR NETT WT.			Kg.
SPECIAL REMARKS			

ALL DIMENSIONS IN MILLIMETRES.

FIRST ANGLE PROJECTION

BROOK CROMPTON

Huddersfield, HD1 3LJ
ENGLAND

NOTE!
2.5 ENDPLAY WILL BE PROVIDED FOR ENDTHRUST PROTECTION WHEN CUSTOMERS NOTIFY US OF THEIR INTENTION TO USE RIGID COUPLINGS AND DRIVEN MACHINES WITHOUT ENDPLAY.

OUTLINE DIMENSIONS OF STANDARD FOOT MOUNTED METRIC A.C. MOTOR. TOTALLY ENCLOSED FAN VENTILATED. FRAME SIZE: W-DF280M (4 POLE UP.)

SCALE	1:8	DATE	DRG. No.	M9111	
DRAWN	B.J.T	19.2.93	DRG. REF.		
CHECKED	B.J.T	19.2.93			
APPROVED	I.J.W	19.2.93	REVISION:	A M.E	DATE 14.6.02