


Shielded D-Sub Backshells DVZK Series


TECHNICAL SPECIFICATIONS


Material:	Zinc, Ni-plated
Temp. range:	-40°C - 120°C
Cable strain relief:	Polycarbonate PC UL94 V-0
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Long jackscrews with moulded top for colour coding
Assembly screws:	Taptite threadforming
Cable outlet:	Angled
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

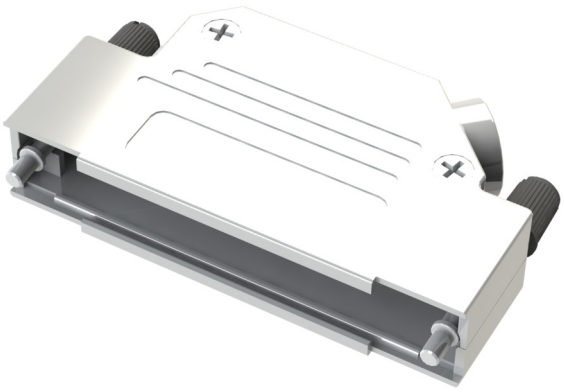









TYPE	A	B
DVZK9	31	36,2
DVZK15	39,5	40,2
DVZK25	53,2	40,2
DVZK37	69,7	40,2
DVZK50	67,2	43,7

PART NUMBERING SYSTEM

DVZK15 - - BULK

Series:
DVZK
Size:
9, 15, 25, 37 or 50
Thread (jackscrew):
Omit = UNC 4-40
M2.5
M2.6
M3.0
Packaging:
K = Kit package
BULK = Bulk / 100 pcs

FEATURES

- Available in sizes 9, 15, 25, 37 and 50
- Minimise interference from electromagnetic and RF sources
- Non-static parts avoid ESD problems
- Accept round foil and braided cable types
- Approved according VDE 0871, FCC 20780 and 89/336/EU
- Printed logotype available upon request
- Long jackscrews with UNC 4-40 thread as standard, M2.5, M2.6 or M3.0 as option
- For custom designed solutions, please consult factory

© Ossi Connectors A/S 2015. Technical data subject to change. All dimensions in millimeters.