


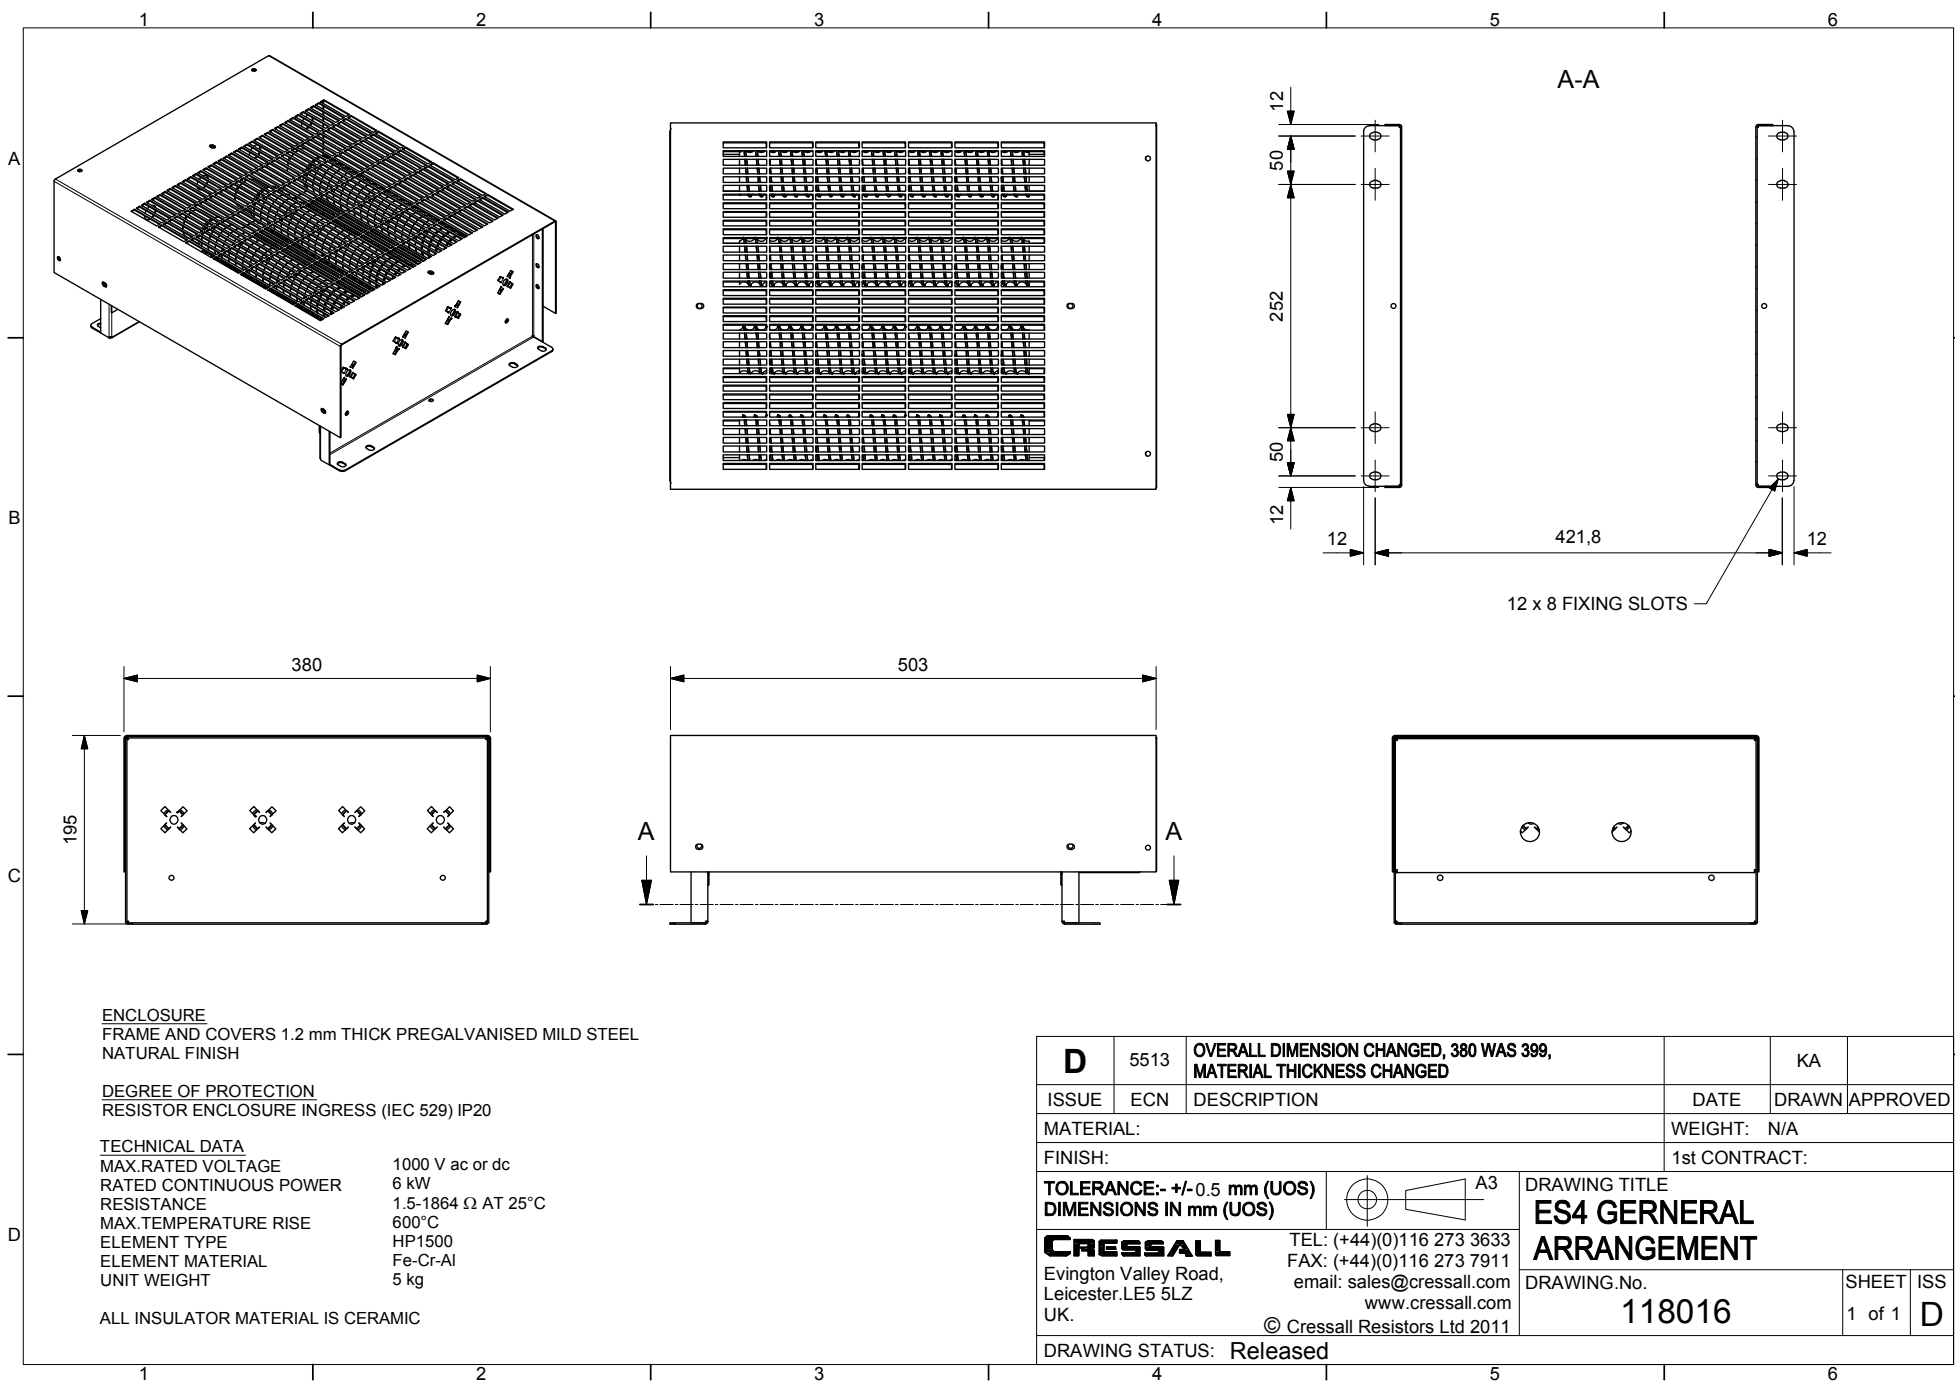


ENCLOSURE
FRAME AND COVERS 1.2 mm THICK PREGALVANISED MILD STEEL
NATURAL FINISH

DEGREE OF PROTECTION
RESISTOR ENCLOSURE INGRESS (IEC 529) IP20

TECHNICAL DATA
MAX.RATED VOLTAGE 1000 V ac or dc
RATED CONTINUOUS POWER 6 kW
RESISTANCE 1.5-1864 Ω AT 25°C
MAX.TEMPERATURE RISE 600°C
ELEMENT TYPE HP1500
ELEMENT MATERIAL Fe-Cr-Al
UNIT WEIGHT 5 kg

ALL INSULATOR MATERIAL IS CERAMIC

D	5513	OVERALL DIMENSION CHANGED, 380 WAS 399, MATERIAL THICKNESS CHANGED		KA	
ISSUE	ECN	DESCRIPTION	DATE	DRAWN	APPROVED
MATERIAL:			WEIGHT: N/A		
FINISH:			1st CONTRACT:		
TOLERANCE:- +/-0.5 mm (UOS) DIMENSIONS IN mm (UOS)				DRAWING TITLE ES4 GERNERAL ARRANGEMENT	
CRESSALL Evington Valley Road, Leicester.LE5 5LZ UK.		TEL: (+44)(0)116 273 3633 FAX: (+44)(0)116 273 7911 email: sales@cressall.com www.cressall.com		DRAWING.No. 118016	
DRAWING STATUS: Released		© Cressall Resistors Ltd 2011		SHEET 1 of 1	ISS D