

DYNAMIC BRAKING RESISTOR

24000 W 2R

TECHNICAL DESCRIPTION : SINGLE PHASE or DC Dynamic Braking Resistor

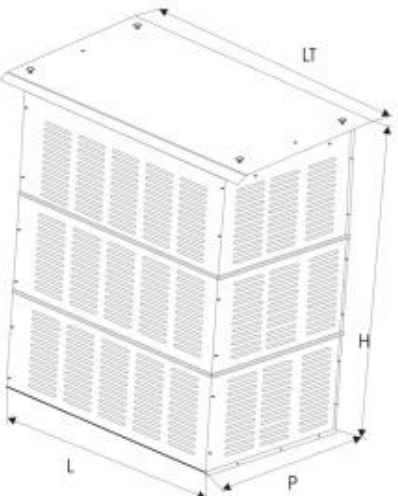
DESCRIPTION OF THE RESISTOR

Nº	Qty	Technology type	Alloy Type	R at 20 Degres	Mains type	P perm. (KW)	P max (KW)	Braking time (sec)	Cycle (sec)
1	1	Wirewound	CR/AL (Chrome Aluminium)	2	Single phase or DC	24	180	10	120

INSULATION and CONNECTION

Insulating Raw material	Cordierite
Insulating Voltage	1 KV
Internal connection raw material	Copper
Connection type	Direct

BOX

Number of boxes	1	
Material	Galvanised Steel	
Finishing	N/A	
Paint	N/A	
Protection Level	IP 23	
Dimensions (LxPxH)	570 x 430 x 600 (approx)	
Dimensions Total (LT)		
Nber of box per resistor	1	
Net Weighth (without packaging)	42 Kg (approx.)	

ACCESSORIES

------	--

REFERENCE

OLD Ref. RE/ 14x6x60x370SI/PRTP/KL24000W2R5% NEW Ref RE/ 03375SI2RW24000	
--	--