



rope length transmitter of series SL3000 - type: SLSL3010-PK1023-MU/GS130/G/F+B

FSG Fernsteuergeräte
Mess- und Regeltechnik GmbH
D-15712 Königs-Wusterhausen
OT Kablow, Mühlenweg 2-3

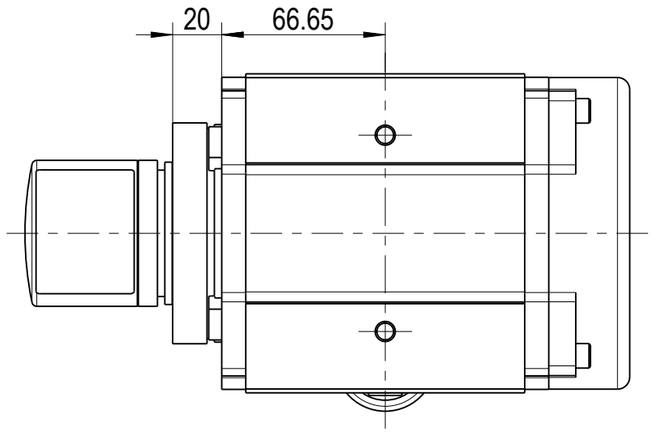

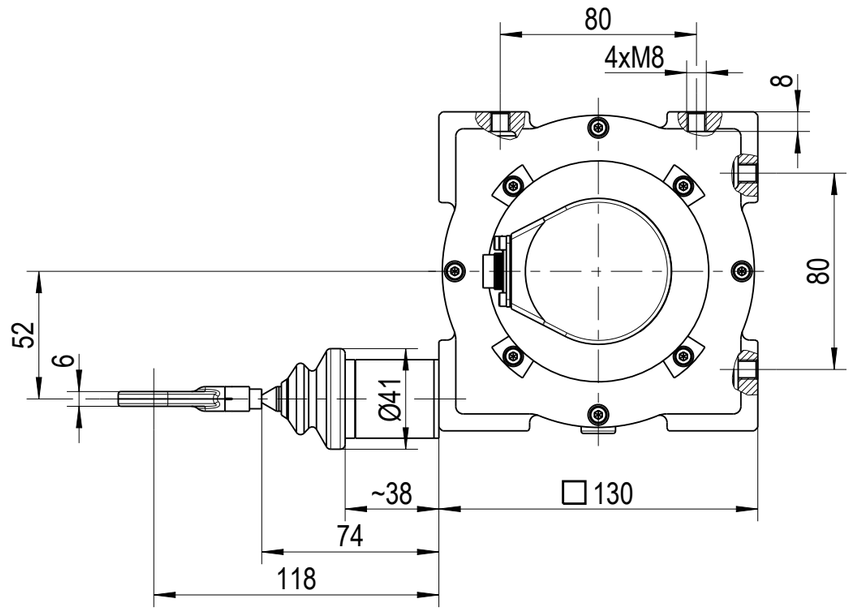

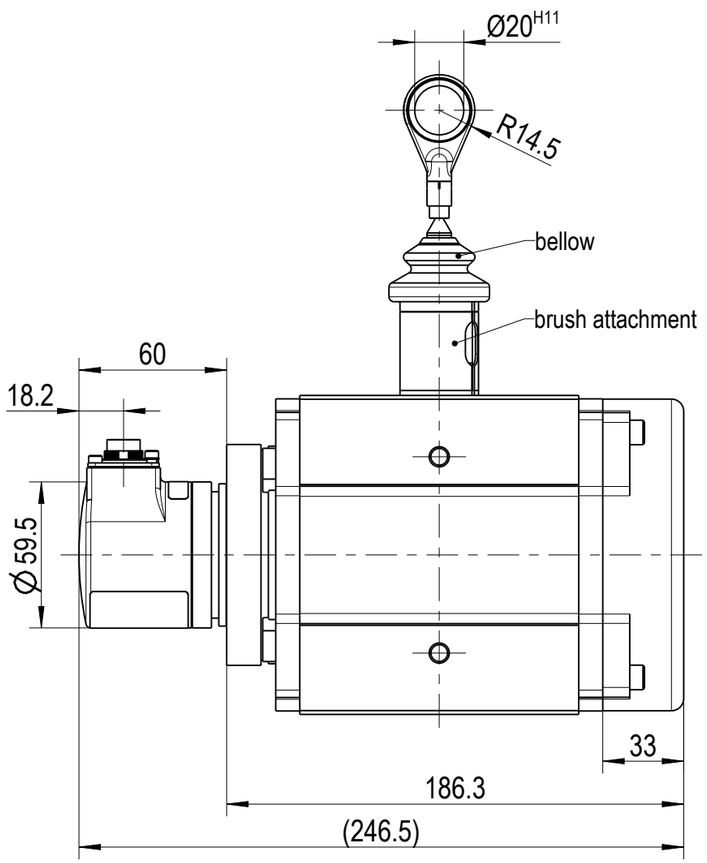

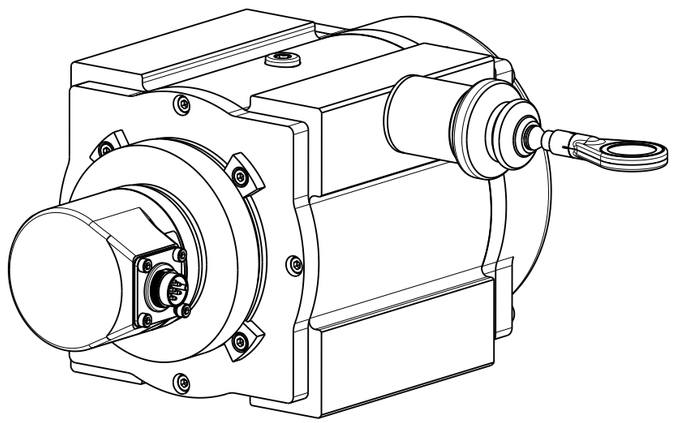

technical details:

measuring range : 0-6m
pull-off length : 10m

casing material : aluminium, anodized
spring casing : plastic (Noryl, black)
screws : stainless steel

wire diameter : Ø1,35mm (high-grade steel 1.4401)
circumference of drum : 334,1mm
measuring accuracy (mechanic) : ±0,05%

spring return : 1 spring cartridge
-initial force : 15N
-ultimate power : 21N

temperature range : -30°C...+70°C
max. adjustment speed : 4 m/sec.
lifetime (*) : 1 mio. cycle
protection class : IP 64
weight : approx. 3,8kg

(*) correspond to the application


encoder system

precision rotary transducer
type: PK1023d-MU

protection class : IP 65
output : 4-20mA, max burden 600Ω
preset to 4-20mA = 0-10m
accuracy (encoder) : 0,2%
supply : 18-33V DC
4-wire system, with galvanic isolation
connection via plug

pin assignment:

Pin 6 : supply
Pin 1 : 18 - 33V DC
Pin 2 : output
Pin 3 : 4 - 20mA



Diese Unterlage ist unser Eigentum
Jede Weitergabe und Vervielfältigung ohne unsere schriftliche Genehmigung oder Konkurrenzfirmen ist strafbar und wird gerichtlich verfolgt.
(Urheberrechtsgesetz, Gesetz gegen unlauteren Wettbewerb BGB)

5930Z01-328M216E /0	ID-no.:	FSG-article-no.:	5930Z01-328.216	Blatt 1/1	M 2:5	Datum	04.01.16
	customer:	Datei:	5930Z01_328M216E .dwg			gezeichnet	C.Dierich
						geprüft	Henkel