

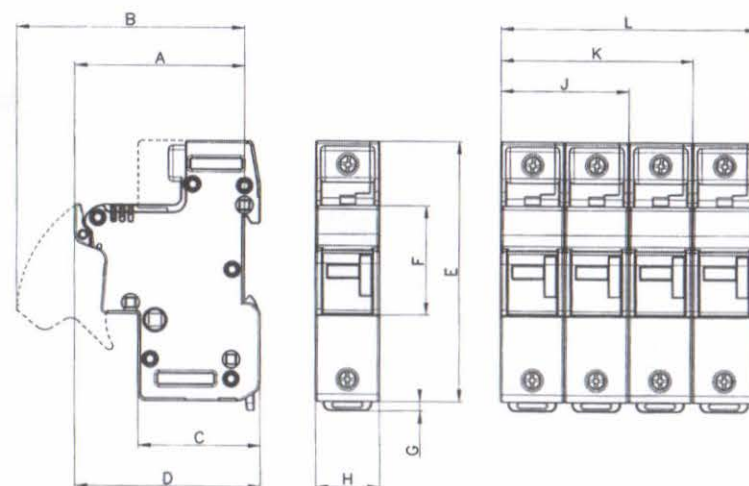
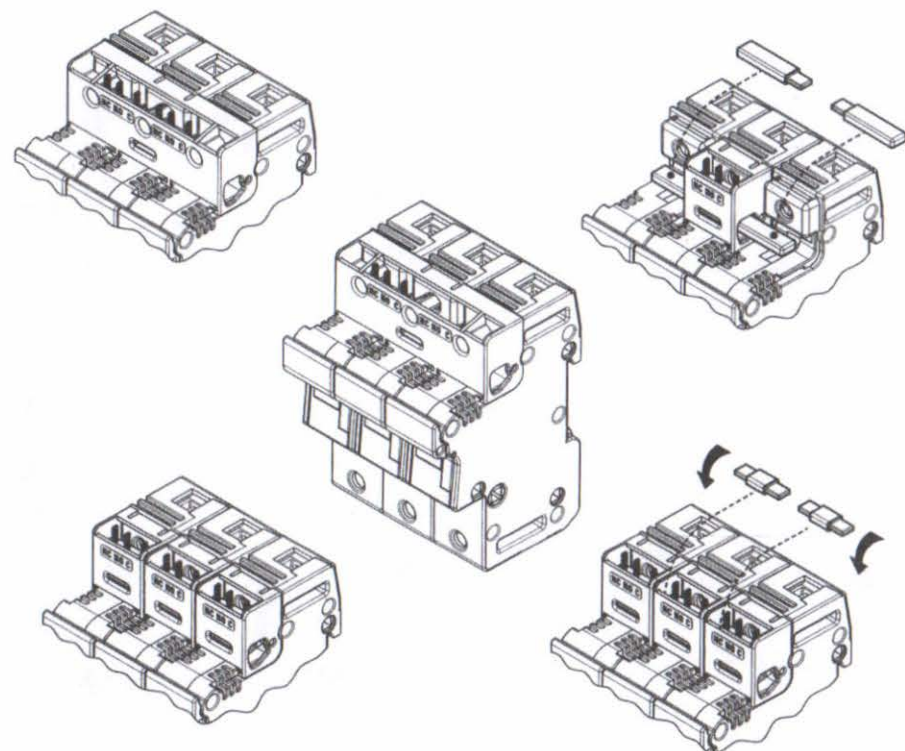
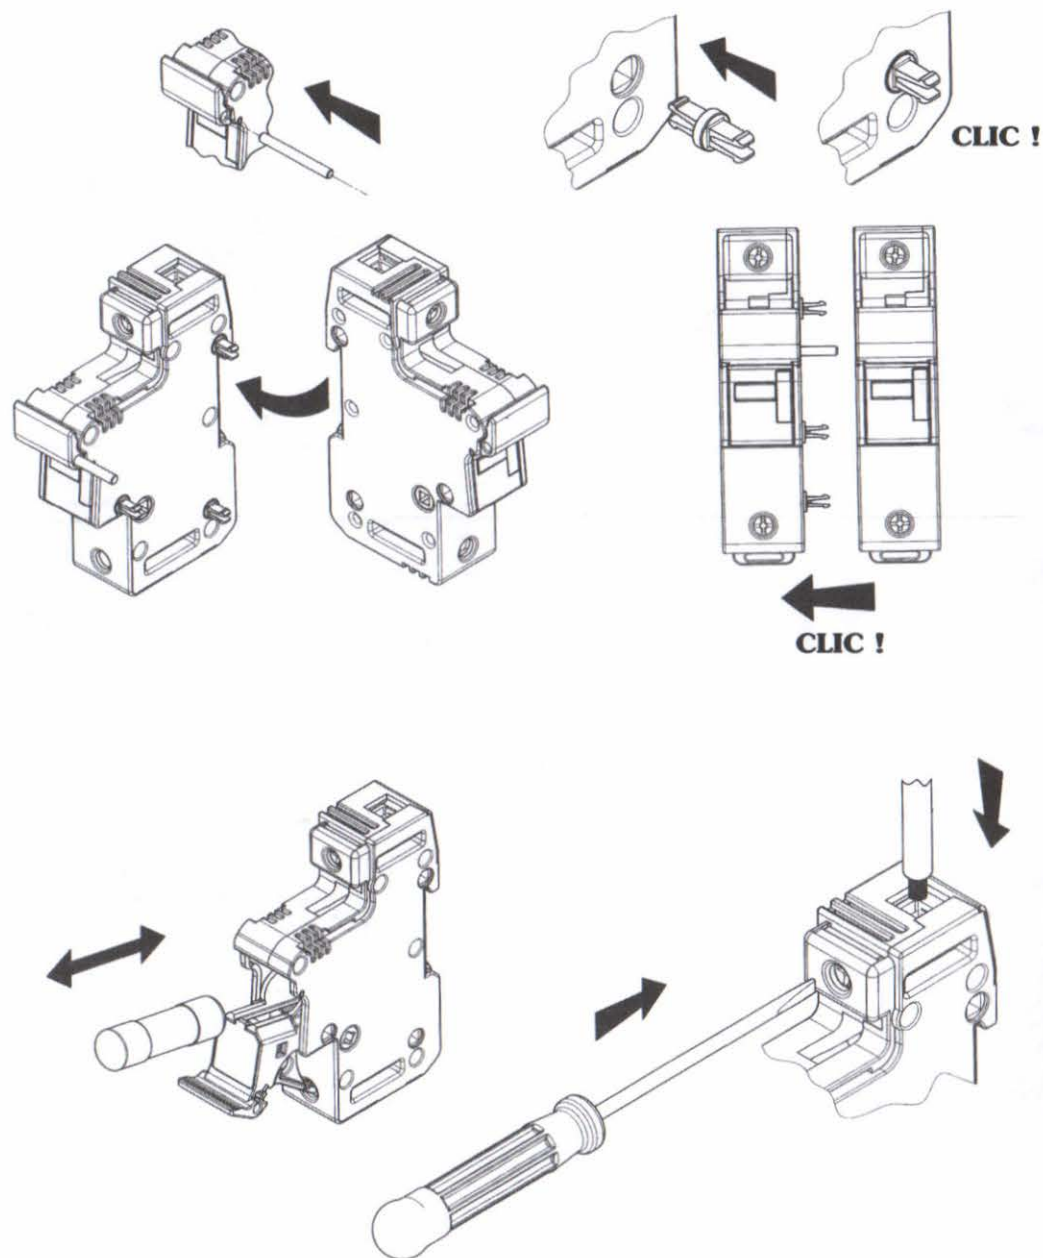
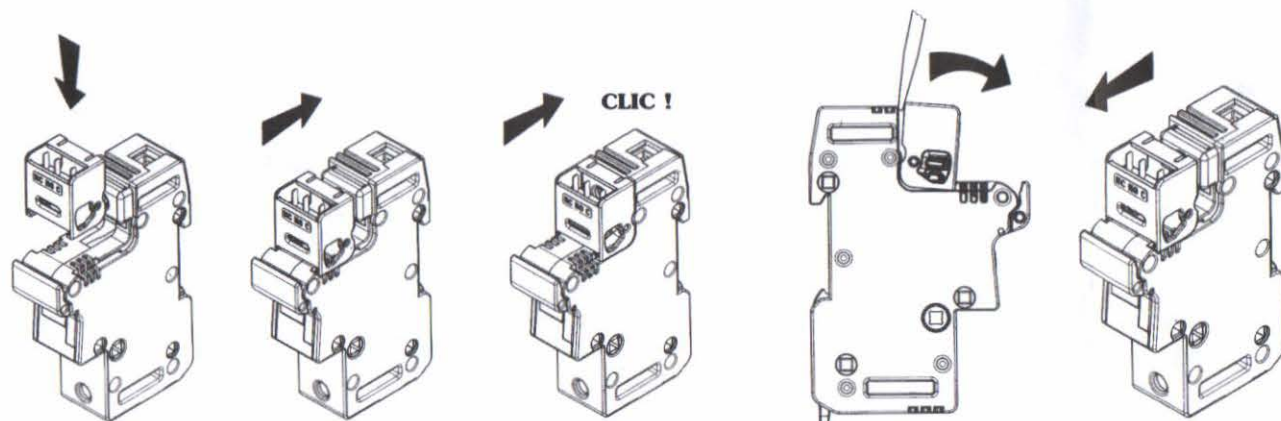
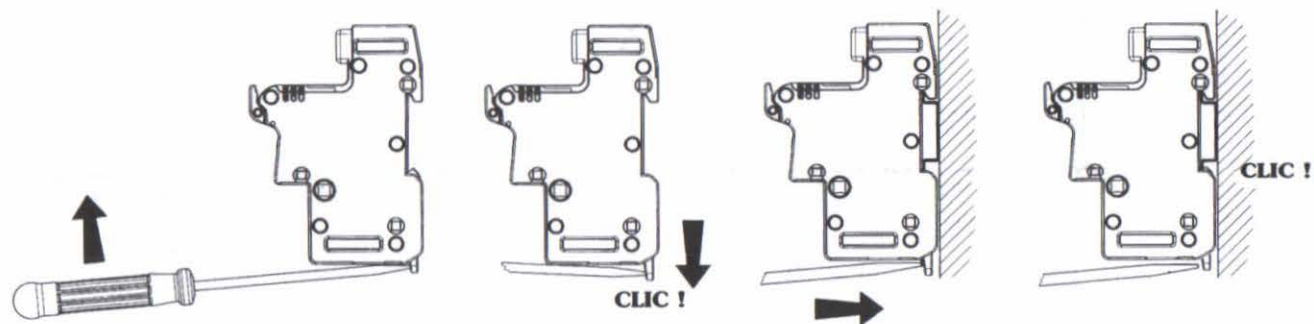


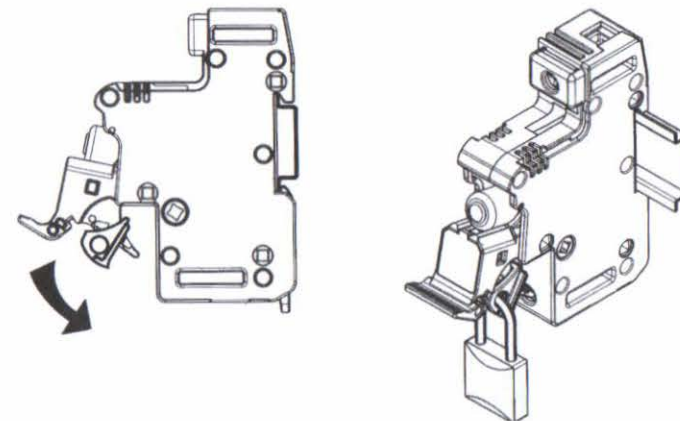

	CMS.14 US.14	CMS.22 US.22
A	70	70
B	94	96,5
C	50,5	50,5
D	76,5	76,5
E	107	126,5
F	45	45
G	3,8	1
H	26,5	35
J	53	70
K	79,5	105
L	106	140

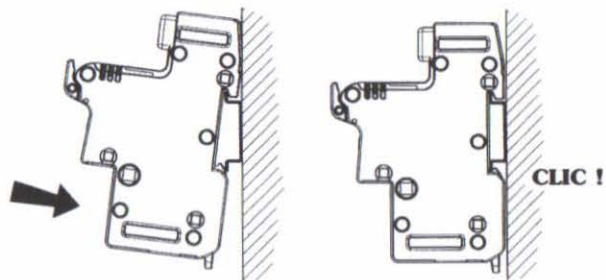

	Tensión Voltage Voltage rating U _N (V)	Tensión Voltage Voltage rating U _N (V)	Intensité Nominale du Fusible Intensidad nominal fusible Fuse current rating I _N (A)	Intensité Maximale du Circuit Intensidad máxima circuito Maximum fuse operating current (A)				Section des câbles Sección cable Adviser cooper wire size (mm²)	Couple de serrage Par Torque
				gG	aM	A70QS	Ultrafast		
CMS.14 US.14	690 750	8	0,25	0,25	0,25				
			0,5						
			1						
			2						
			4						
			6						
			8						
			10						
			12						
			16						
			20						
			25						
32									
40									
50									
CMS.22 US.22	690 750	8	1	1	1				
			2						
			4						
			6						
			8						
			10						
			12						
			16						
			20						
			25						
			32						
			40						
			50						
			63						
			80						
			100						
			125						
			CMS.22 US.22						
2									
4									
6									
8									
10									
12									
16									
20									
25									
32									
40									
50									
63									
80									
100									
125									