


DRY, UNBEDDED STATIC TORQUE = 5 Nm
 FOR 24 VOLT d.c. OPERATION
 POWER CONSUMPTION = 12 WATTS

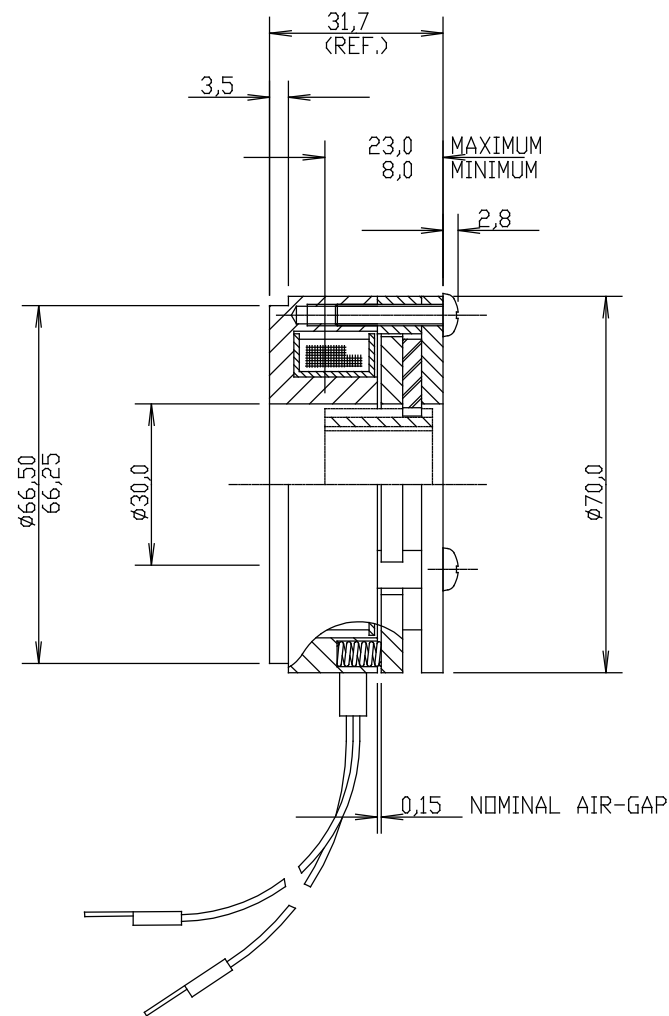

MATRIX
INTERNATIONAL
Brechin • Scotland • DD9 7EP
Tel: +44 (0)1356 602000 Fax: +44 (0)1356 602060
Email: tech@matrix-international.co.uk


THIS DRAWING IS THE PROPERTY OF
MATRIX INTERNATIONAL LIMITED AND IT MAY
NOT BE COPIED OR USED FOR ANY PURPOSE
EXCEPT DIRECTLY FOR THE COMPANY WITH
THEIR PRIOR WRITTEN CONSENT NOR IS IT
TO BE SHOWN TO ANY THIRD PARTY.

1. DIMENSIONS IN MILLIMETRES (mm).
2. SURFACE TEXTURE VALUES IN $\mu\text{m Ro}_{32}$ ✓
UNSPECIFIED MACHINED SURFACES
3. UNTOLERANCED MACHINED DIMENSIONS $\pm 0.25\text{mm}$
ANGLES REFERENCE ONLY.
4. SHARP EDGES MACHINED $0.40 \times 45^\circ$
(OR EQUIVALENT RADI).

TITLE:-

INSTALLATION DRAWING
OF A SPRING APPLIED,
E'M RELEASED BRAKE.
(STANDARD TORQUE.)

AutoCAD GENERATED



- A3

ISSUE	REV
DRAWING NUMBER	

1EB020-55

DATE
ISSUE

1

1	-	17/08/9
ISSUE	MOD No.	DATE

DERIVED FROM 1EB020-30