


NOTES:

1. ENDURANCE TEST, MINIMUM LIFE 500 DYNAMIC STOPS FROM 3300 RPM TO 0 RPM, IN A TEST WITH $J = 10,2 \times 10^{-3} \text{ kgm}^2$ PROVIDING THE ENERGY PER HOUR DOES NOT EXCEED 30 KJ.
2. VALUE APPLIES WITH ABB VARISTOR REF. 5248 122-256 WIRED INTO ELECTRICAL CIRCUIT.
3. FRICTION PLATE COMPRISES OF AN ALUMINIUM CORE PLATE WITH BK 6481 "SCORCHED" FRICTION FACINGS.



©

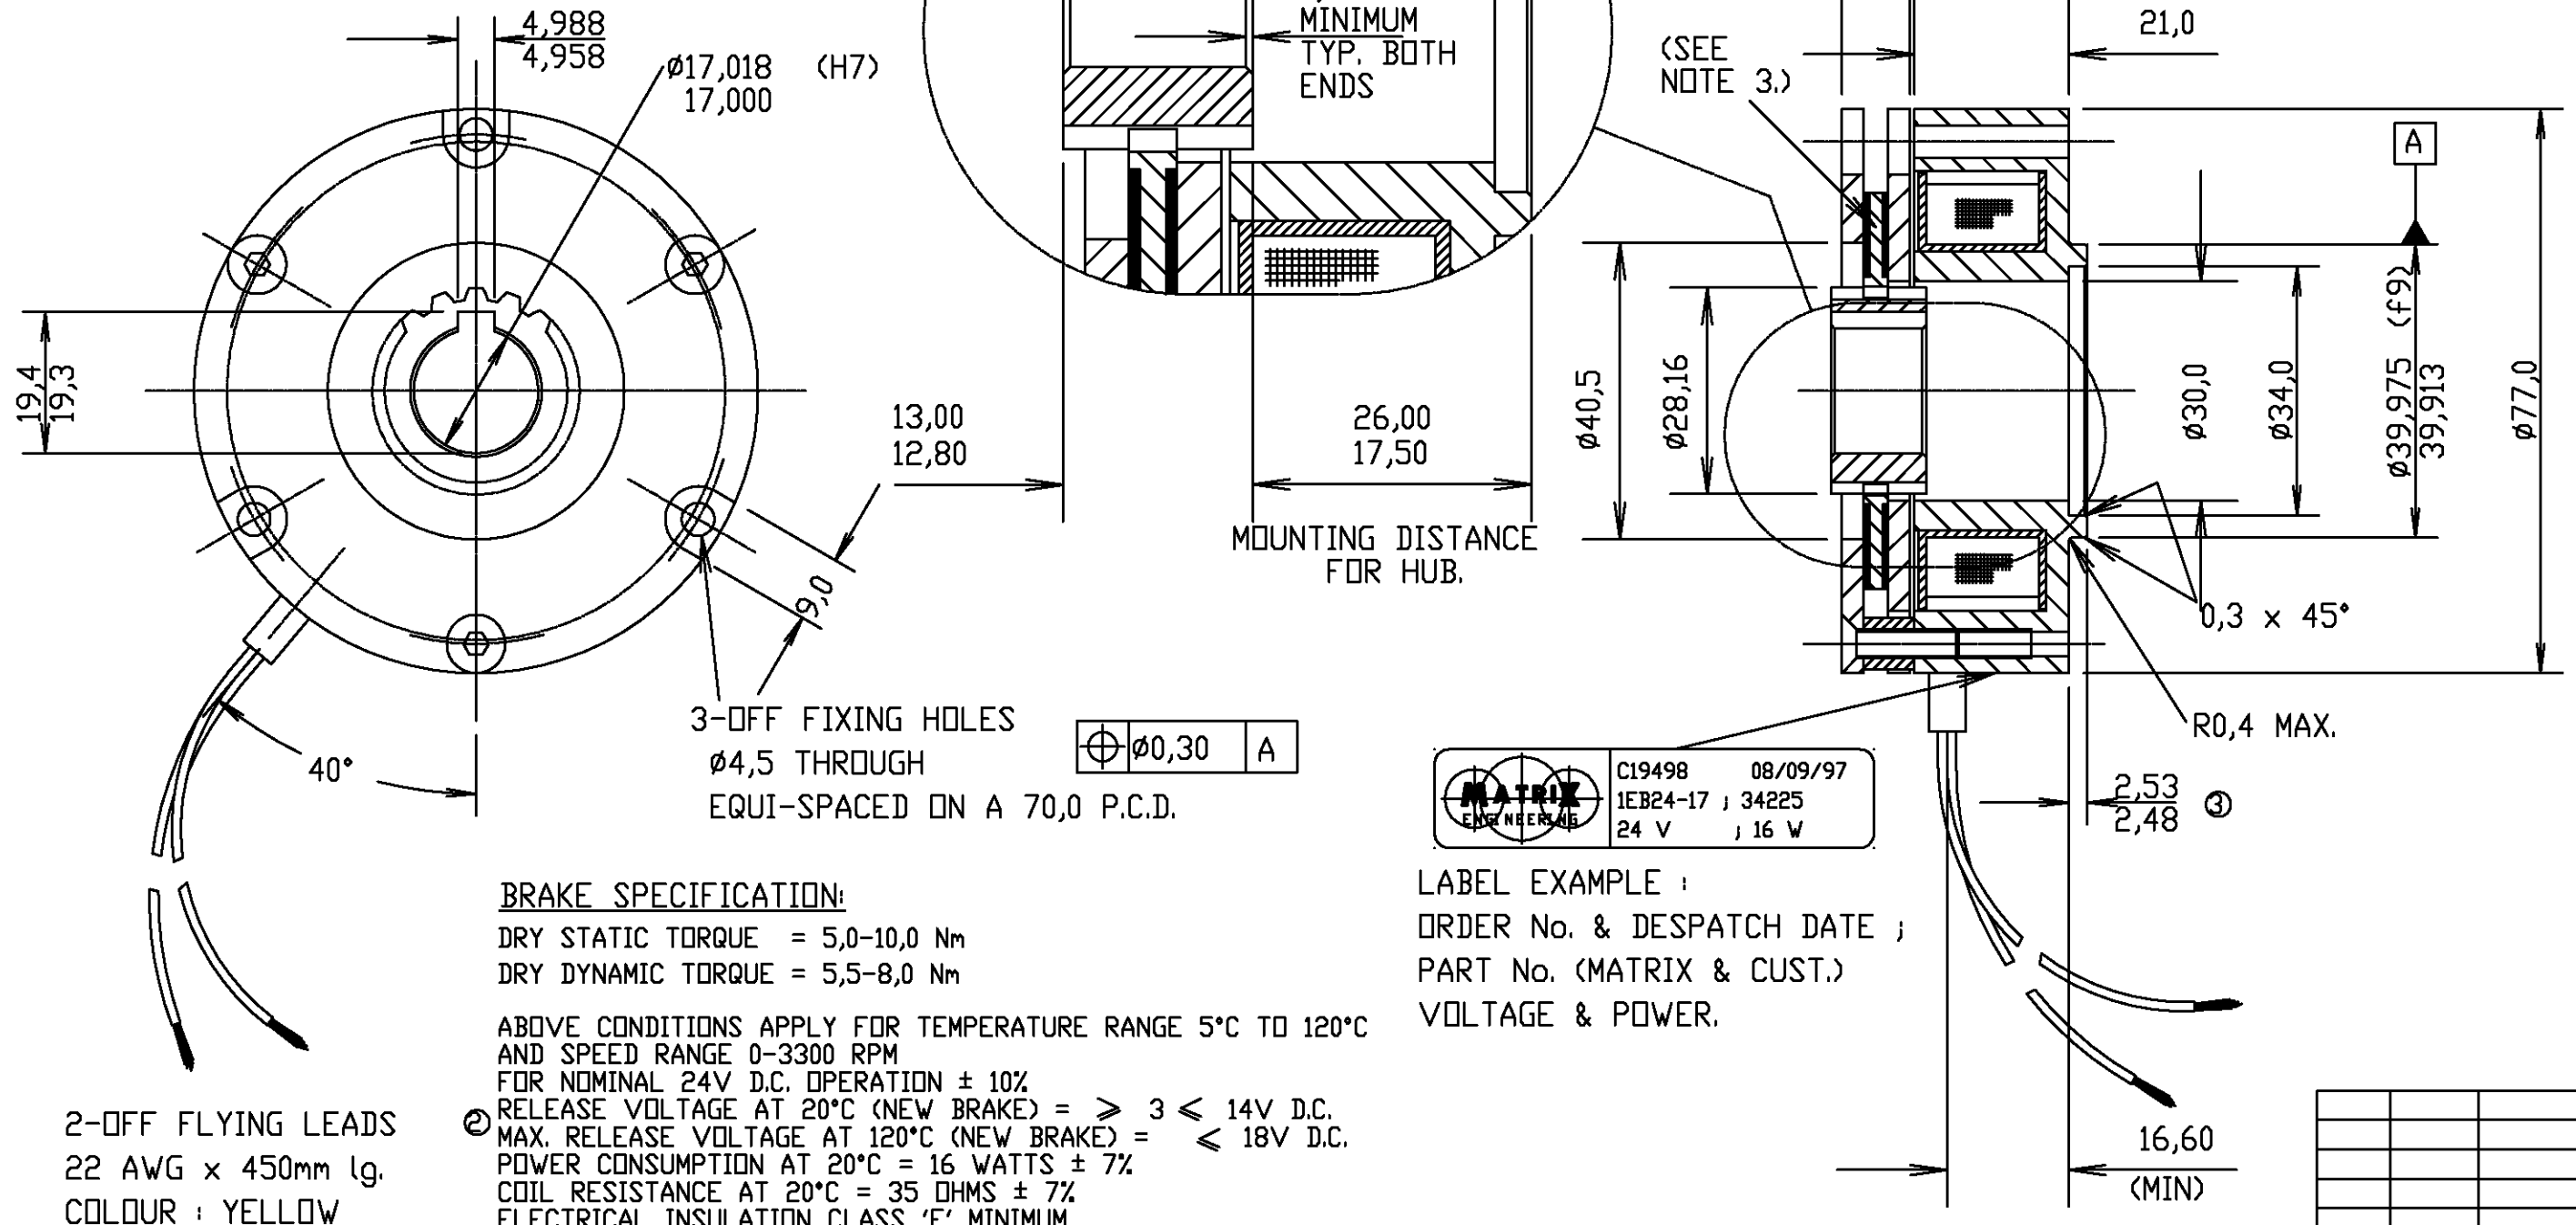

Matrix Engineering Limited.
 Brechin, Angus
 SCOTLAND DD9 7EP.
 tel 01356 622212
 fax 01356 624799

THIS DRAWING IS THE PROPERTY OF
 MATRIX ENGINEERING LIMITED AND IT MAY NOT
 BE COPIED OR USED FOR ANY PURPOSE EXCEPT
 DIRECTLY FOR THE COMPANY WITHOUT THEIR PRIOR
 WRITTEN CONSENT NOR IS IT TO BE SHOWN
 TO ANY THIRD PARTY.

THE FOLLOWING CONDITIONS APPLY UNLESS OTHERWISE STATED.

1. DIMENSIONS IN MILLIMETRES (mm).
2. SURFACE TEXTURE VALUES IN $\mu\text{m Ra}$.
3. UNTOLERANCED MACHINED SURFACES UNLESS SPECIFIED OTHERWISE.
4. SCALE 1:1.

TITLE:-

INSTALLATION DRAWING
 OF A SPRING APPLIED,
 E'M RELEASED BRAKE.

DRAWN

CHECKED

A3.

DRAWING NUMBER

1EB24-17

ISSUE

3

ISSUE	MOD No.	DATE
3	17973	25/05/99
2	17845	19/12/97
1	-	30/09/97