MULTIBLOC® 000.ST9

Size 000, 125A, 690VAC, Design for Bottom Fitting, Triple Pole

IEC FUSE SWITCH DISCONNECTORS

NH FUSE SWITCH DISCONNECTOR



The production programme of MULTIBLOC® 000.ST9 comprises NH fuse switch disconnectors for 125A.

They are designed for bottom fitting/panel installation and are available in triple pole units.

For installation of MULTIBLOC® NH fuse switch disconnectors of different sizes in distribution units with central cover, respective covers are used to obtain a uniform profile in height and length.

MULTIBLOC® size 000 are designed for NH fuse-links in accordance with IEC/EN 60269-2, VDE 0636-2.

MULTIBLOC® offers the user the possibility of fast and easy installation as well as a high degree of security during installation and maintenance.

TECHNICAL DATA OVERVIEW

Voltage AC	690 VAC
Voltage DC	250 VDC
Amper (A)	125 A
Size per Standard	000
SCCR	Ue=AC 500 V; Ie=125A 80kA Ue=AC 690 V; Ie= 80A 80kA Ue=DC 250V; Ie=125A 25kA
Mounting	bottom fitting/panel
Switchability	triple pole switching

FEATURES & BENEFITS

- Touch protection IP 30
- Large windows with testing holes
- Width of switch 54mm, installation depth 81mm
- Cable termination: frame clamp 2,5 - 50mm²
- Indicating switch for switch door position - optional
- Safe on load connection/disconnection in accordance with IEC 60947
- Padlocking and sealing facility integrated
- Fuse monitoring version available

APPLICATIONS

- House incoming units
- Meter distribution units
- Measuring transformer cabinets
- Transmitting stations for telecommunications

STANDARDS

- IEC/EN 60 947-3
  For NH-fuse links size 000 in accordance with IEC/EN 60 269-2, VDE 0636-2

CE

© 2021 Mersen. All rights reserved. Mersen reserves the right to change, adapt, limit or discontinue its products. Therefore the data provided herein are for information only and are not contractually binding. To ensure that Mersen provides the best solution to your needs, please contact and provide Mersen with all relevant technical specifications and conditions.

MULTIBLOC® 000.ST9

Size 000, 125A, 690VAC, Design for Bottom Fitting, Triple Pole

PRODUCT RANGE



1.005.070

MULTIBLOC® 000.ST9 size 000 125 A, 690VAC bottom fitting, triple pole

Catalog number	Item number	Poles	Cable termination components	Package	Weight
1.005.070	D1070423	3	6 frame clamps 2,5–50 mm²	1 piece	0.43 kg

MULTIBLOC® 000.ST9 size 000 125 A, 690VAC bottom fitting, triple pole, equipped with Fuse Monitoring module

Catalog number	Item number	Poles	Cable termination components	Package	Weight
1.005.170	J1070428	3	6 frame clamps 2,5-50mm²	1 piece	-


TECHNICAL DATA IN ACCORDANCE WITH EN / IEC 60947

	000.ST9 triple pole
Number of poles/phases	3
Size	000
Conventional free air thermal current with NH-fuse links I_{th}	125 A
Max. power dissipation of fuse links P_n	9 W
Conventional free air thermal current with solid links I_{th}	160 A
Max. power dissipation of solid links P_n	1,2 W
Rated operational voltage U_e	690 V
Utilization category to IEC/EN 60947-3 U_e = AC 400 V; I_e = 100 A U_e = AC 400 V; I_e = 125 A U_e = AC 500 V; I_e = 100 A U_e = AC 500 V; I_e = 125 A U_e = AC 690 V; I_e = 80 A U_e = DC 250 V; I_e = 125 A (all poles serial) U_e = DC 250 V; I_e = 80 A (L1/L3 serial)	 AC 23 B AC 22 B AC 22 B AC 21 B AC 21 B DC 22 B DC 21 B
Rated insulation voltage U_i	1000 V
Rated impulse withstand voltage U_{imp}	6 kV
Rated frequency	50 ... 60 Hz
Degree of protection	IP 30
Degree of pollution	3
Rated duty	uninterrupted duty
Rated short circuit making capacity with solid links I_{cm}	5.1 kApeak
Rated short-time withstand current I_{cw}	3.5 kA / 1 s
Rated conditional short-circuit current with fuse links U_e = AC 500 V; I_e = 125 A U_e = AC 690 V; I_e = 80 A U_e = DC 250 V; I_e = 125 A	 80 kA 80 kA 25 kA
Power dissipation by I_{th} without NH-fuse links	8W at 100A load 13W at 125A load
Cable terminal connection	
Standard cable terminal	frame clamp 2,5-50mm²
Installation mode	bottom fitting

© 2021 Mersen. All rights reserved. Mersen reserves the right to change, adapt, limit or discontinue its products. Therefore the data provided herein are for information only and are not contractually binding. To ensure that Mersen provides the best solution to your needs, please contact and provide Mersen with all relevant technical specifications and conditions.


DIMENSIONS

MULTIBLOC® 000.ST9 size 000 125 A, 690VAC bottom fitting, triple pole (M01204)

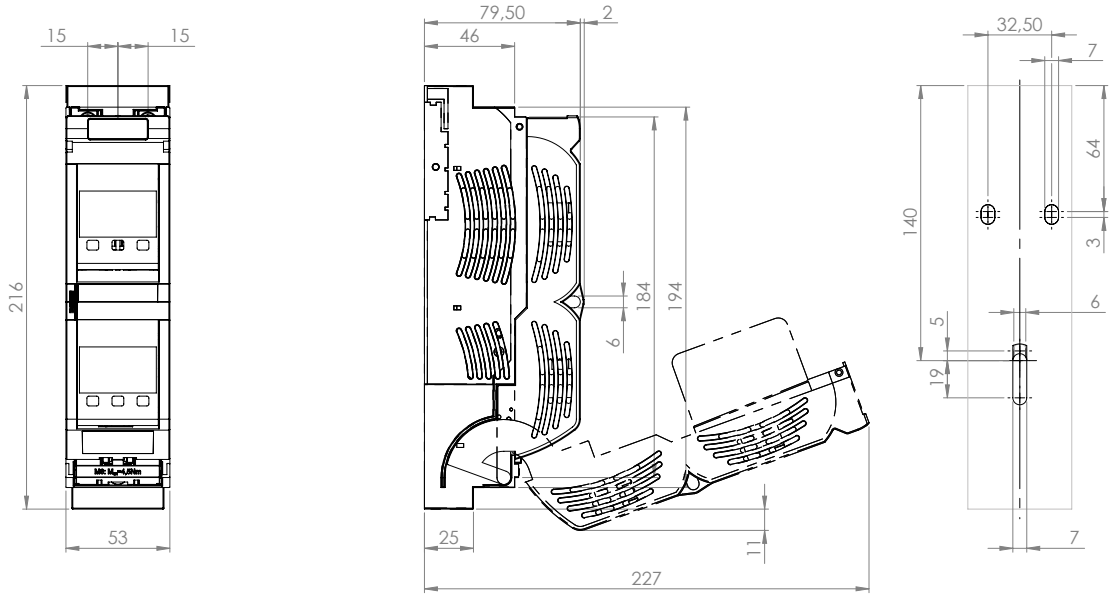

Dimensions in mm

MULTIBLOC® 000.ST9 size 000 125 A, 690VAC bottom fitting, triple pole, equipped with Fuse Monitoring module (M01209)

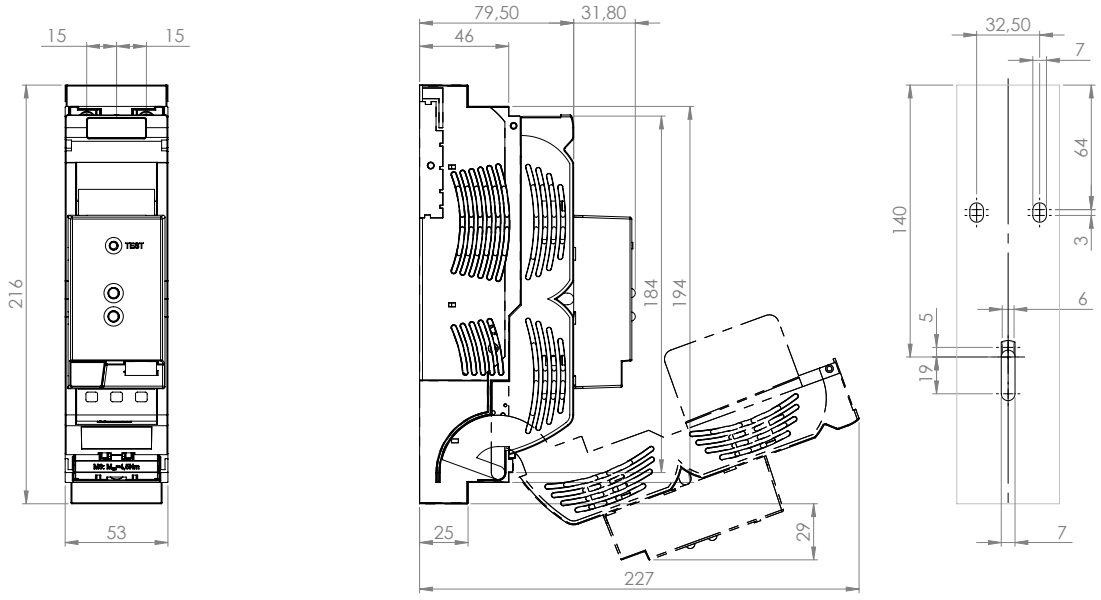

Dimensions in mm

© 2021 Mersen. All rights reserved. Mersen reserves the right to change, adapt, limit or discontinue its products. Therefore the data provided herein are for information only and are not contractually binding. To ensure that Mersen provides the best solution to your needs, please contact and provide Mersen with all relevant technical specifications and conditions.


ACCESSORIES

Installation devices

Catalog number	Item number	Design	Package	Weight
1.005.082	F1070425	adapter for installation on to DIN-rails in accordance with DIN EN 60715, 35 x 7,5 mm and 35 x 15 mm for 000.ST9 triple pole	1 piece	44 g

Indication facilities

Catalog number	Item number	Design	Package	Weight
1.005.080	E1070424	indicator for switch door position micro switch, 1 change-over contact 5 A, 250 V for MULTIBLOC® 000.ST9 and 000.RST9	1 piece	10 g



1.005.080

NH Solid links / Measuring links

Catalog number	Item number	Size	Rated current I_n	Package	Weight
Solid links with live tags					
NH00NEUTRAL	Z218269	000/00	160 A	15	80 g



NH00NEUTRAL

© 2021 Mersen. All rights reserved. Mersen reserves the right to change, adapt, limit or discontinue its products. Therefore the data provided herein are for information only and are not contractually binding. To ensure that Mersen provides the best solution to your needs, please contact and provide Mersen with all relevant technical specifications and conditions.