
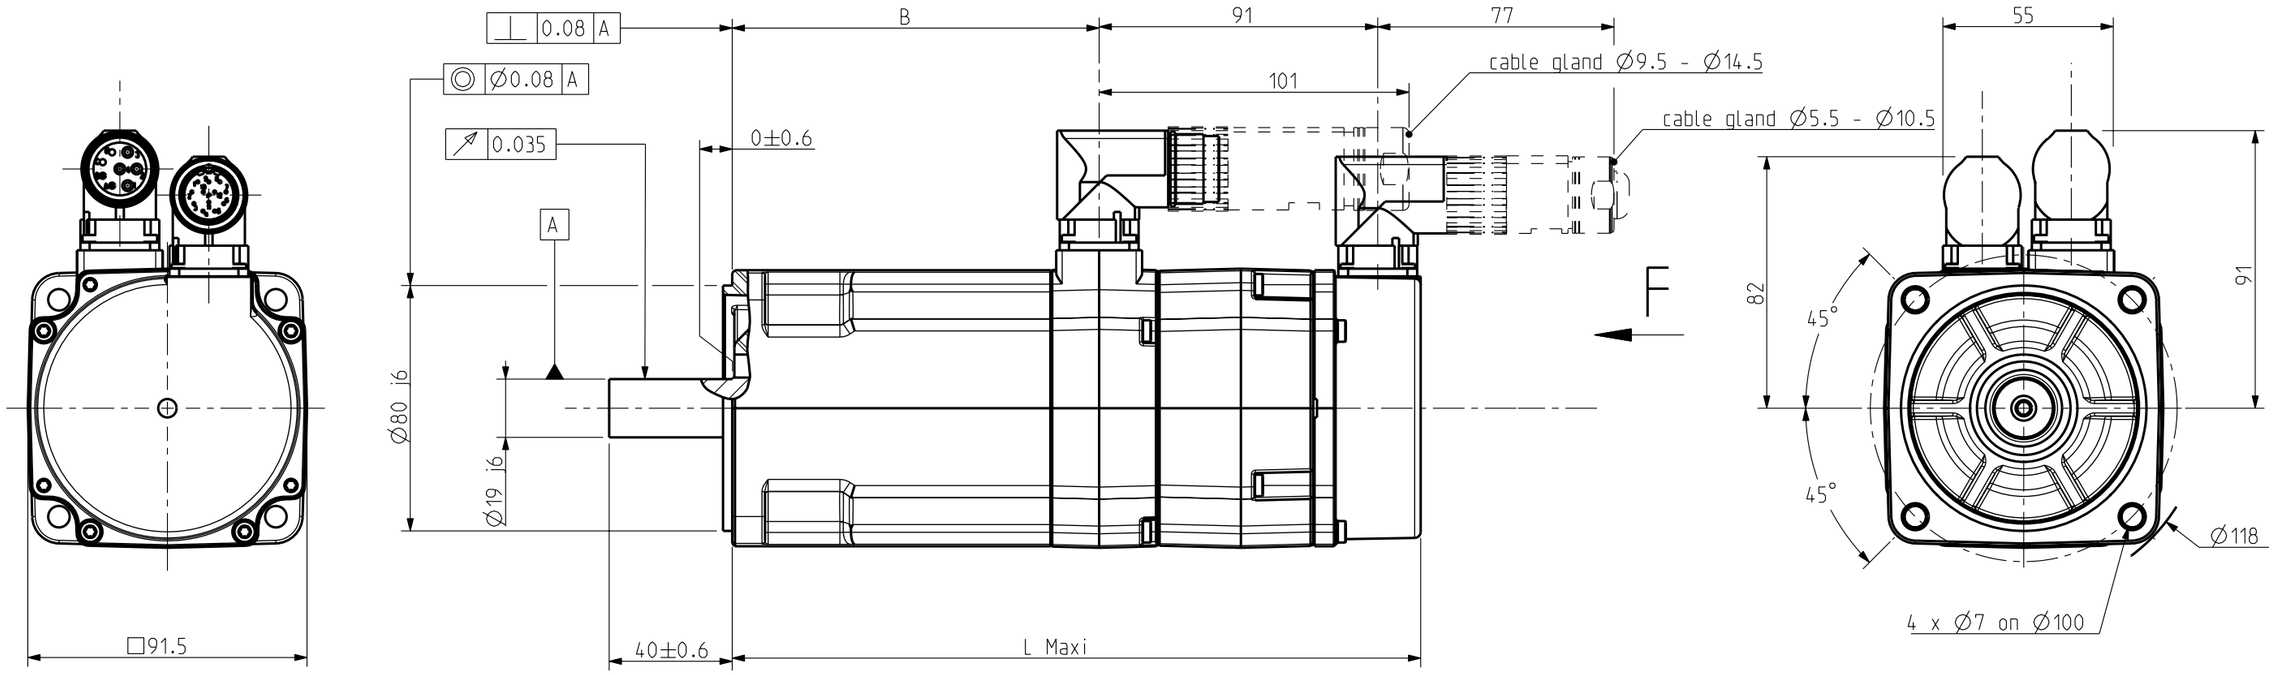



POWER CONNECTOR



F view

1 : Phase U
2 : Ground
3 : Phase W
4 : Phase V
A : Brake +
B : Brake -
C, D : No connection

FEEDBACK CONNECTOR




F VIEW

BRAKE


Supply voltage : 24V ⎓ ±10%
Static torque

	NX420	NX430
20 °C	6 Nm	6 Nm
100 °C	5 Nm	5 Nm

ORIENTATION OF CONNECTORS

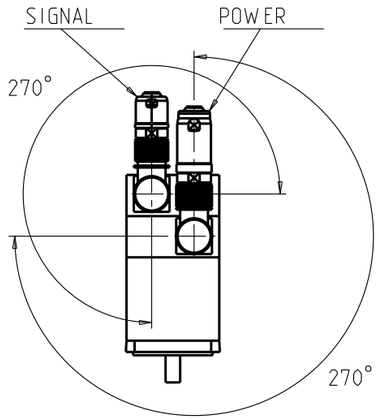

SHAFT END



DIMENSIONS

	NX420	NX430
L Maxi	226	251
B	120	145

Weight :

This document is the property of PARVEX.Transmission as well as reproduction or copy is not permitted without written authorisation.

Drawn	16/12/99	JMB	Visa					
Modifications	c	AM 21012 20/03/02 RG		f	AM 21992 09/06/05 YG			
	b	AM 20589 05/01/01 RG		e	AM 21359 02/04/03 NV			
	a	AM 20366 02/11/00 PR		d	AM 21163 23/09/02 SP			

Scale 1:2

SSD DRIVES
PARVEX
8 Avenue du lac. BP249
21007-DIJON cedex-FRANCE
www.parvex.com

NX400 + BRAKE

OUTLINE DRAWING

Format	F	E	S	G	I	
A3	x	x				

344178AE7300 f