

RE.0 444 NV

DC Tachogenerator




- Applications :**
- Industry
 - Speed control & regulation


- Descriptions :**
- New design with terminal box
 - Magnetic circuit intended for standard industrial applications
 - Flange mounting only
 - Available with temperature compensation



RE.0444 NV – B5 flange

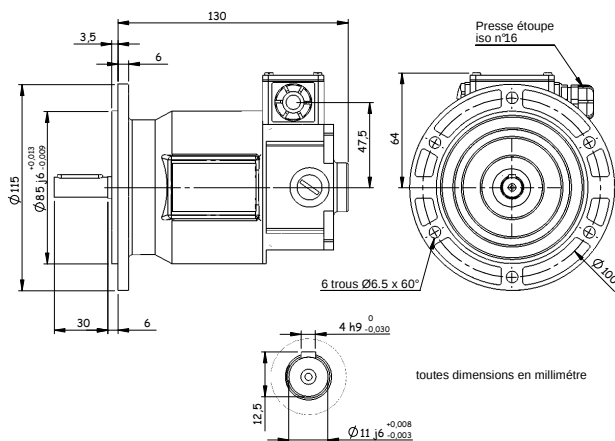

RE.0444 NV – US flange

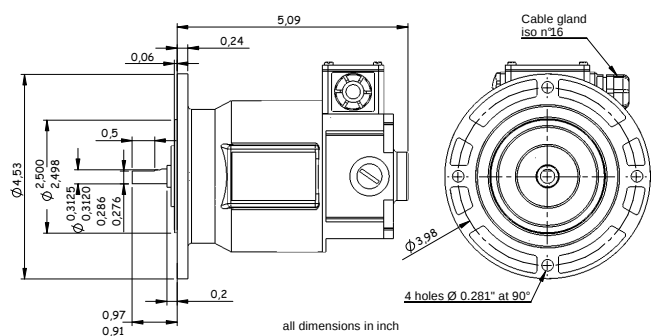

MAIN CHARACTERISTICS

DESCRIPTION	SYMB	VALUE	CONSTRUCTION DETAILS	
Max. speed	n_m	12 000 rpm	Number of poles	2
Moment of inertia	J	0,95 Kg cm ²	Armature slots number	19
No-load driving torque	M_r	1,5 N.cm	Commutator blades number	19
Max. radial shaft stress	F	0,4 (Ø7) / 1,0 (Ø11) da N	Insulation class	B (IEC 34-1)
Maximum E.M.F.	E_m	300 V	Operating temperature	-30 / +130 °C
Maximum linearity error	ΔE	$\leq 0,15 \% E_T$	Climatic protection	C _a (IEC 68-1)
Overall ripple rate (peak to peak)	ΔE_c	$\leq 0,5 \% E_c$	Ingress protection	IP44 (IEC 34-5)
Rotation harmonics (f=2 p.n)	ΔE_p	$\leq 0,2 \% E_c$	Direction of rotation	reversible
Slots harmonics (f=Z.n.)	ΔE_z	$\leq 0,3 \% E_c$	Excitation	Permanent magnets Alnico
Calibration precision	ΔE_o	+ 1 % E_{T_o}	Weight	1,8 kg
E.M.F. temperature drift				
Not compensated	ΔE_e	0,02 %/°C		
Compensated		0,005 %/°C		
Time constant	C_t	2,5 ms		
*Filter :				
Time constant of filter		0,47 ms		
Load current	L_c	5 mA		
Speed	n	3000 rpm		

RE.0 444 NV

DC Tachogenerator

MECHANICAL OPTIONS

	MOUNTING SIDE					OPPOSITE MOUNTING SIDE
	D (mm)	L (mm)	F (mm)	GA (mm)	Ball-bearing	Ball-bearing
RE.0444 NV standard	11	30	4	12,5	12 x 28 x 8 ZZ	8 x 22 x 7 ZZ
RE.0444 NV	7	30	2	8	12 x 28 x 8 ZZ	8 x 22 x 7 ZZ
RE.0444 NV – US version					12 x 28 x 8 ZZ	8 x 22 x 7 ZZ



Markings and polarity of terminals (cables) for counter-clockwise rotation, seen from the shaft

A1 : +

A2 : -

ELECTRICAL OPTIONS

DESCRIPTION	SYMB	UNIT	VALUES				
Voltage at 1 000 rpm	E_n	V	20	40	50	60	100
Voltage gradient	C_v	V / rpm	0,02	0,04	0,05	0,06	0,10
Armature resistance	R_a	Ω	12	45	70	100	280
Max thermal load	I_{th}	A	0,55	0,25	0,22	0,18	0,11
Max. Allowed speed	n_a	rpm	12 000	7 500	6 000	5 000	3 000

BRUSHES

QUANTITY	DIMENSION	GRADE	MAX OUTPUT VOLTAGE	PART NO
4	3,1 x 4,1 x 12,5 mm	Silver-graphite	300 V max	/0001397

PRODUCT DESCRIPTION

RE.0444 NV B C1X60 CA IP44 11X30

RE.0444 NV	444 NV type	
B	Flange B5	US Flange (US) available
C	T° compensation (optional)	
1X	1 Commutator	
60	Voltage at 1 000 rpm	from 20 thru 100 V available
CA	Silver-graphite brushes	
IP44	Ingress protection	
11X30	Shaft dimensions (mm)	7x30 mm available