




Overall dimensions [mm]
Abmessungen [mm]
Dimensiones [mm]

Flameproof motors Ex d / Ex de II CT4
Motoren mit druckfester Kapselung Ex d / Ex de II CT4
Moteurs antideflagrants Ex d / Ex de II CT4
IM 1001

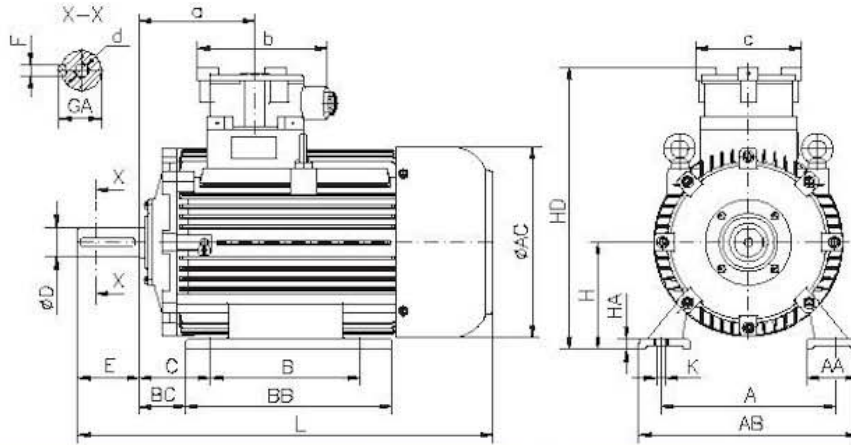

Frame size Baugröße Hauteur d'axe	A	B	C	H	K	Dm6		E		F re		GA		d	AA	AB	
						2p= 2	2p=4,6,8	2p=2	2p= 4, 6, 8	2p=2	2p=4,6,8	2p= 2	2p=4,6,8				
225S	356	286	149	225	18.5	-	60	-	140	-	18	-	64	M 20	100	440	
225M	356	311	149	225	18.5	55	60	110	140	16	18	59	64	M 20	100	440	
250M	406	349	168	250	24	60	65	140	140	18	18	64	69	M 20	120	500	
280S	457	368	190	280	24	65	75	140	140	18	20	69	79.5	M 20	120	550	
280M	457	419	190	280	24	65	75	140	140	18	20	69	79.5	M 20	120	550	
315S	508	406	216	315	28	65	80	140	170	18	22	69	85	M 20	130	630	
315M	508	457	216	315	28	65	80	140	170	18	22	69	85	M 20	130	630	
315MX/LX	508	457	216	315	28	65	80	140	170	18	22	69	85	M 20	120	626	
315LY	508	508	216	315	28	65	80	140	170	18	22	69	85	M 20	120	626	
315LZ	508	508	216	315	28	65	80	140	170	18	22	69	85	M 20	120	626	
355M	610	560	254	355	28	70	100	140	210	20	28	74.5	106	M20	M24	110	714
355L	610	630	254	355	28	70	100	140	210	20	28	74.5	106	M20	M24	110	714
Frame size Baugröße Hauteur d'axe	BB	BC	HA	AC	HD	L		a	b	c							
						2p= 2	2p> 2										
225S	430	114	20	446	635	-	915	245	305	245							
225M	430	114	20	446	635	885	915	245	305	245							
250M	480	114	20	446	660	965	965	245	305	245							
280S	460	147	18	500	758	1042	1042	275	380	295							
280M	500	147	18	500	758	1082	1082	275	380	295							
315S	528	151.5	27	560	826	1190	1220	300	380	295							
315M	568	151.5	27	560	826	1230	1260	300	380	295							
315MX/LX	588	176	27	620	857	1220	1280	315	380	295							
315LY	588	176	27	620	857	1290	1350	315	380	295							
315LZ	588	176	27	620	857	-	1350	315	380	295							
355M	695	177	32	705	960	1490	1560	320	460	355							
355L	695	177	32	705	960	1570	1640	320	460	355							