Data sheet for three-phase Squirrel-Cage-Motors INNOMOTICS

Motor type : 1CV3133C **INNOMOTICS SD - 132 M - IM B3 - 6p**

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Safe Area

Electrical data **-/-**

U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η 3) 4/4	η 3) 3/4	η 3) 2/4	cosφ 3) 4/4	cosφ 3) 3/4	cosφ 3) 2/4	I_A/I_N I_I/I_N	M_A/M_N T_I/T_N	M_K/M_N T_B/T_N	IE-CL
DOL duty (S1) - 155(F) to 130(B)																	
415	Δ	50	5.50	-/-	12.10	975	54.0	88.0	88.3	87.2	0.72	0.64	0.51	6.8	2.7	3.4	IE3
480	Δ	60	6.30	-/-	11.60	1175	51.0	89.5	89.7	88.6	0.73	0.66	0.53	7.1	2.3	3.5	IE2
480	Δ	60	5.50	7.50	10.70	1180	44.5	91.0	90.8	89.2	0.69	0.61	0.48	7.8	3.0	4.0	MG1

IM B3 / IM 1001		FS 132 M	CC032A	IP55	UKCA	IEC/EN 60034	IEC, EN, UL, CSA, NEMA MG1-12-12	kVA Code: L	

Environmental conditions : -20 °C - +40 °C / 1000 m	Locked rotor time (hot / cold) : 19.9 s | 27 s

Mechanical data

Sound level (SPL / SWL) at 50Hz|60Hz	63 / 75 dB(A) 2) 3)	67 / 79 dB(A) 2) 3)	Vibration severity grade	A
Moment of inertia	0.0500 kg m²		Thermal class	F
Bearing DE | NDE	6208 2Z C3	6208 2Z C3	Duty type	S1
bearing lifetime			Direction of rotation	bidirectional
L_{10mh} $F_{Rad\ min}$ for coupling operation 50|60Hz 1)	40000 h	32000 h	Frame material	cast iron
Regreasing device	Without		Net weight of the motor (IM B3)	76 kg
Grease nipple	-/-		Coating (paint finish)	Standard paint finish C2
Type of bearing	Preloaded bearing DE		Color, paint shade	RAL7030
Condensate drainage holes	With (standard)		Motor protection	(B) 3 PTC thermistors - for tripping (2 terminals)
External earthing terminal	Without		Method of cooling	IC411 - self ventilated, surface cooled

Terminal box

Terminal box position	top	Max. cross-sectional area	6 mm²
Material of terminal box	cast iron	Cable diameter from ... to ...	11 mm - 21 mm
Type of terminal box	TB1 H01	Cable entry	2xM32x1,5-1xM16x1,5
Contact screw thread	M4	Cable gland	3 plugs

I_A/I_N = locked rotor current / current nominal
M_A/M_N = locked rotor torque / torque nominal
M_K/M_N = break down torque / nominal torque

1) L_{10mh} according to DIN ISO 281 10/2010
2) at rated power / at full load
3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department	Technical reference	Created by	Approved by	*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.*	Link documents
IN LVM		SPC	Created automatically		

INNOMOTICS

Document type	Document status
Technical data sheet	Released
Document title	**Document number**
1LE1523-1CC33-5AB4-Z	TDS-241014-125056
B02+B61+F01+F11+F50+M11	

Restricted	Revision	Creation date	Language	Page
© Innomotics 2024	AA	2024-10-14	en	1/2

Branding disclaimer applies

Data sheet for three-phase Squirrel-Cage-Motors INNOMOTICS

Motor type : 1CV3133C **INNOMOTICS SD - 132 M - IM B3 - 6p**

Special design

B02	Acceptance test certificate 3.1 acc. to EN 10204	F11	Brake supply voltage, 230 V AC, 50/60 Hz
B61	Document order dimension drawing	F50	Mechanical manual brake release with lever (cannot be locked)
F01	Mounting of holding brake	M11	Stainless steel rating plate

Additional information:

Brake:

Description:	BFK458-16	Current:	0.27 A
Voltage:	AC 230 V	Moment of inertia:	0.001500 kgm²

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department	Technical reference	Created by	Approved by	*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.*	Link documents
IN LVM		SPC	Created automatically		

INNOMOTICS

Document type	Document status
Technical data sheet	Released
Document title	**Document number**
1LE1523-1CC33-5AB4-Z B02+B61+F01+F11+F50+M11	TDS-241014-125056

Restricted	Revision	Creation date	Language	Page
© Innomotics 2024	AA	2024-10-14	en	2/2

Branding disclaimer applies

Confi® ıtre de secret d'entreprise. Tous droits ®servés.
Comunicado come secreto empresarial. Reservados todos os direitos.
Confiado como secreto de empresa. Nos reservamos todos los derechos.
Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for the payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.
Weitergabe sowie Vervielf¶ltigung, Verbreitung und/oder Bearbeitung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdr¸cklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte f¸r den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

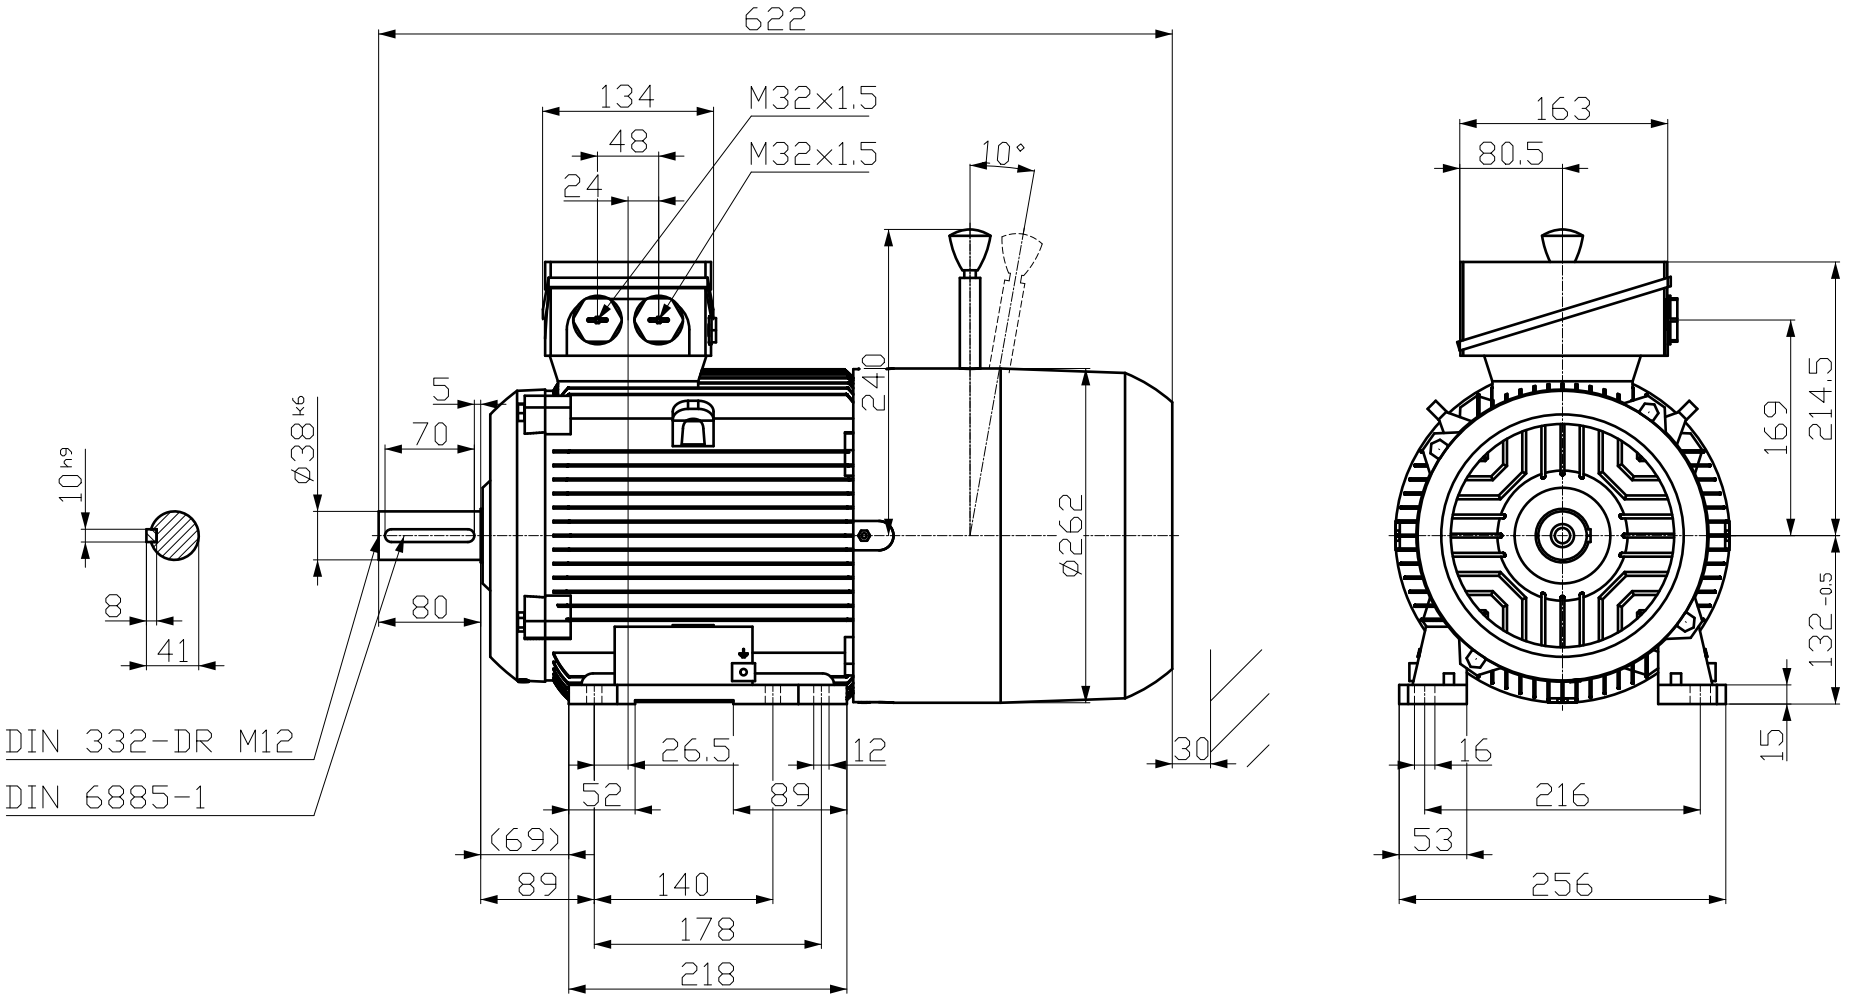

Tolerance	Surface	Material	Weight	Scale
			-	mm
1LE1523-1CC33-5AB4-Z B02+B61+F01+F11+F50+M11	Author Creator 14/10/2024 SPC Approval Created automatically Department IN LVM Change Order	Dimensional drawing MaÇzeichnung	MLFB	Doc Type /
INNOMOTICS	Doc State Released Revision AA Index RS		Item No	Paper Size A3
			Doc No	1st Language en 2nd Language de
© Innomotics 2024	Project No -		Ref No -	Sheet 1 of 1

Technische nderungen vorbehalten!
Technical data are subject to change!