

Data sheet for three-phase Squirrel-Cage-Motors INNOMOTICS



Motor type : 1CV3164A

INNOMOTICS SD - 160 L - IM B3 - 2p

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project Q126830JB InverterDrive

Remarks	Safe Area
Electrical data	-/-

U	Δ / Y	f	P	P	I	n	M	η ³⁾			cosφ ³⁾			I _A /I _N	M _A /M _N	M _K /M _N	IE-CL
[V]		[Hz]	[kW]	[hp]	[A]	[1/min]	[Nm]	4/4	3/4	2/4	4/4	3/4	2/4	I _I /I _N	T _I /T _N	T _B /T _N	
DOL duty (S1) - 155(F) to 130(B)																	
400	Δ	50	18.50	-/-	32.00	2955	60.0	92.4	92.8	92.4	0.90	0.87	0.80	9.0	2.8	4.2	IE3
690	Y	50	18.50	-/-	18.60	2955	60.0	92.4	92.8	92.4	0.90	0.87	0.80	9.0	2.8	4.2	IE3
460	Δ	60	21.30	-/-	32.00	3555	57.0	91.7	91.5	90.3	0.91	0.88	0.80	9.0	2.6	4.2	IE3
460	Δ	60	18.50	-/-	28.50	3560	49.5	91.7	91.5	90.3	0.89	0.86	0.78	10.2	3.0	4.8	IE3
IM B3 / IM 1001		FS 160 L				IP55	UKCA	IEC/EN 60034			IEC, DIN, ISO, VDE, EN						
Environmental conditions : -20 °C - +40 °C / 1000 m									Locked rotor time (hot / cold) : 13.5 s 19.9 s								

Mechanical data

Sound level (SPL / SWL) at 50Hz 60Hz	70 / 82 dB(A) ^{2) 3)}	77 / 89 dB(A) ^{2) 3)}	Vibration severity grade	A
Moment of inertia	0.0680 kg m ²		Thermal class	F
Bearing DE NDE	6209 2Z C3	6209 2Z C3	Duty type	S1
bearing lifetime			Direction of rotation	bidirectional
L _{10mh} F _{Rad min} for coupling operation 50 60Hz ¹⁾	40000 h	32000 h	Frame material	cast iron
Regreasing device	Without		Net weight of the motor (IM B3)	123 kg
Grease nipple	-/-		Coating (paint finish)	Standard paint finish C2
Type of bearing	Locating bearing NDE		Color, paint shade	RAL7030
Condensate drainage holes	With (standard)		Motor protection	(B) 3 PTC thermistors - for tripping (2 terminals)
External earthing terminal	Without		Method of cooling	IC411 - self ventilated, surface cooled

Terminal box


Terminal box position	top	Max. cross-sectional area	16 mm ²
Material of terminal box	cast iron	Cable diameter from ... to ...	19 mm - 28 mm
Type of terminal box	TB1 J01	Cable entry	2xM40x1,5-1xM16x1,5
Contact screw thread	M5	Cable gland	3 plugs

I _A /I _N = locked rotor current / current nominal M _K /M _N = locked rotor torque / torque nominal M _B /M _N = break down torque / nominal torque	1) L _{10mh} according to DIN ISO 281 10/2010 2) at rated power / at full load	3) Value is valid only for DOL operation with motor design IC411
---	---	--

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LVM	Technical reference	Created by SPC	Approved by Created automatically	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
INNOMOTICS	Document type Technical data sheet			Document status Released			
	Document title 1LE1503-1DA43-4AB4			Document number TDS-250428-125240			
Restricted © Innomotics 2025				Revision AA	Creation date 2025-04-28	Language en	Page 1/1



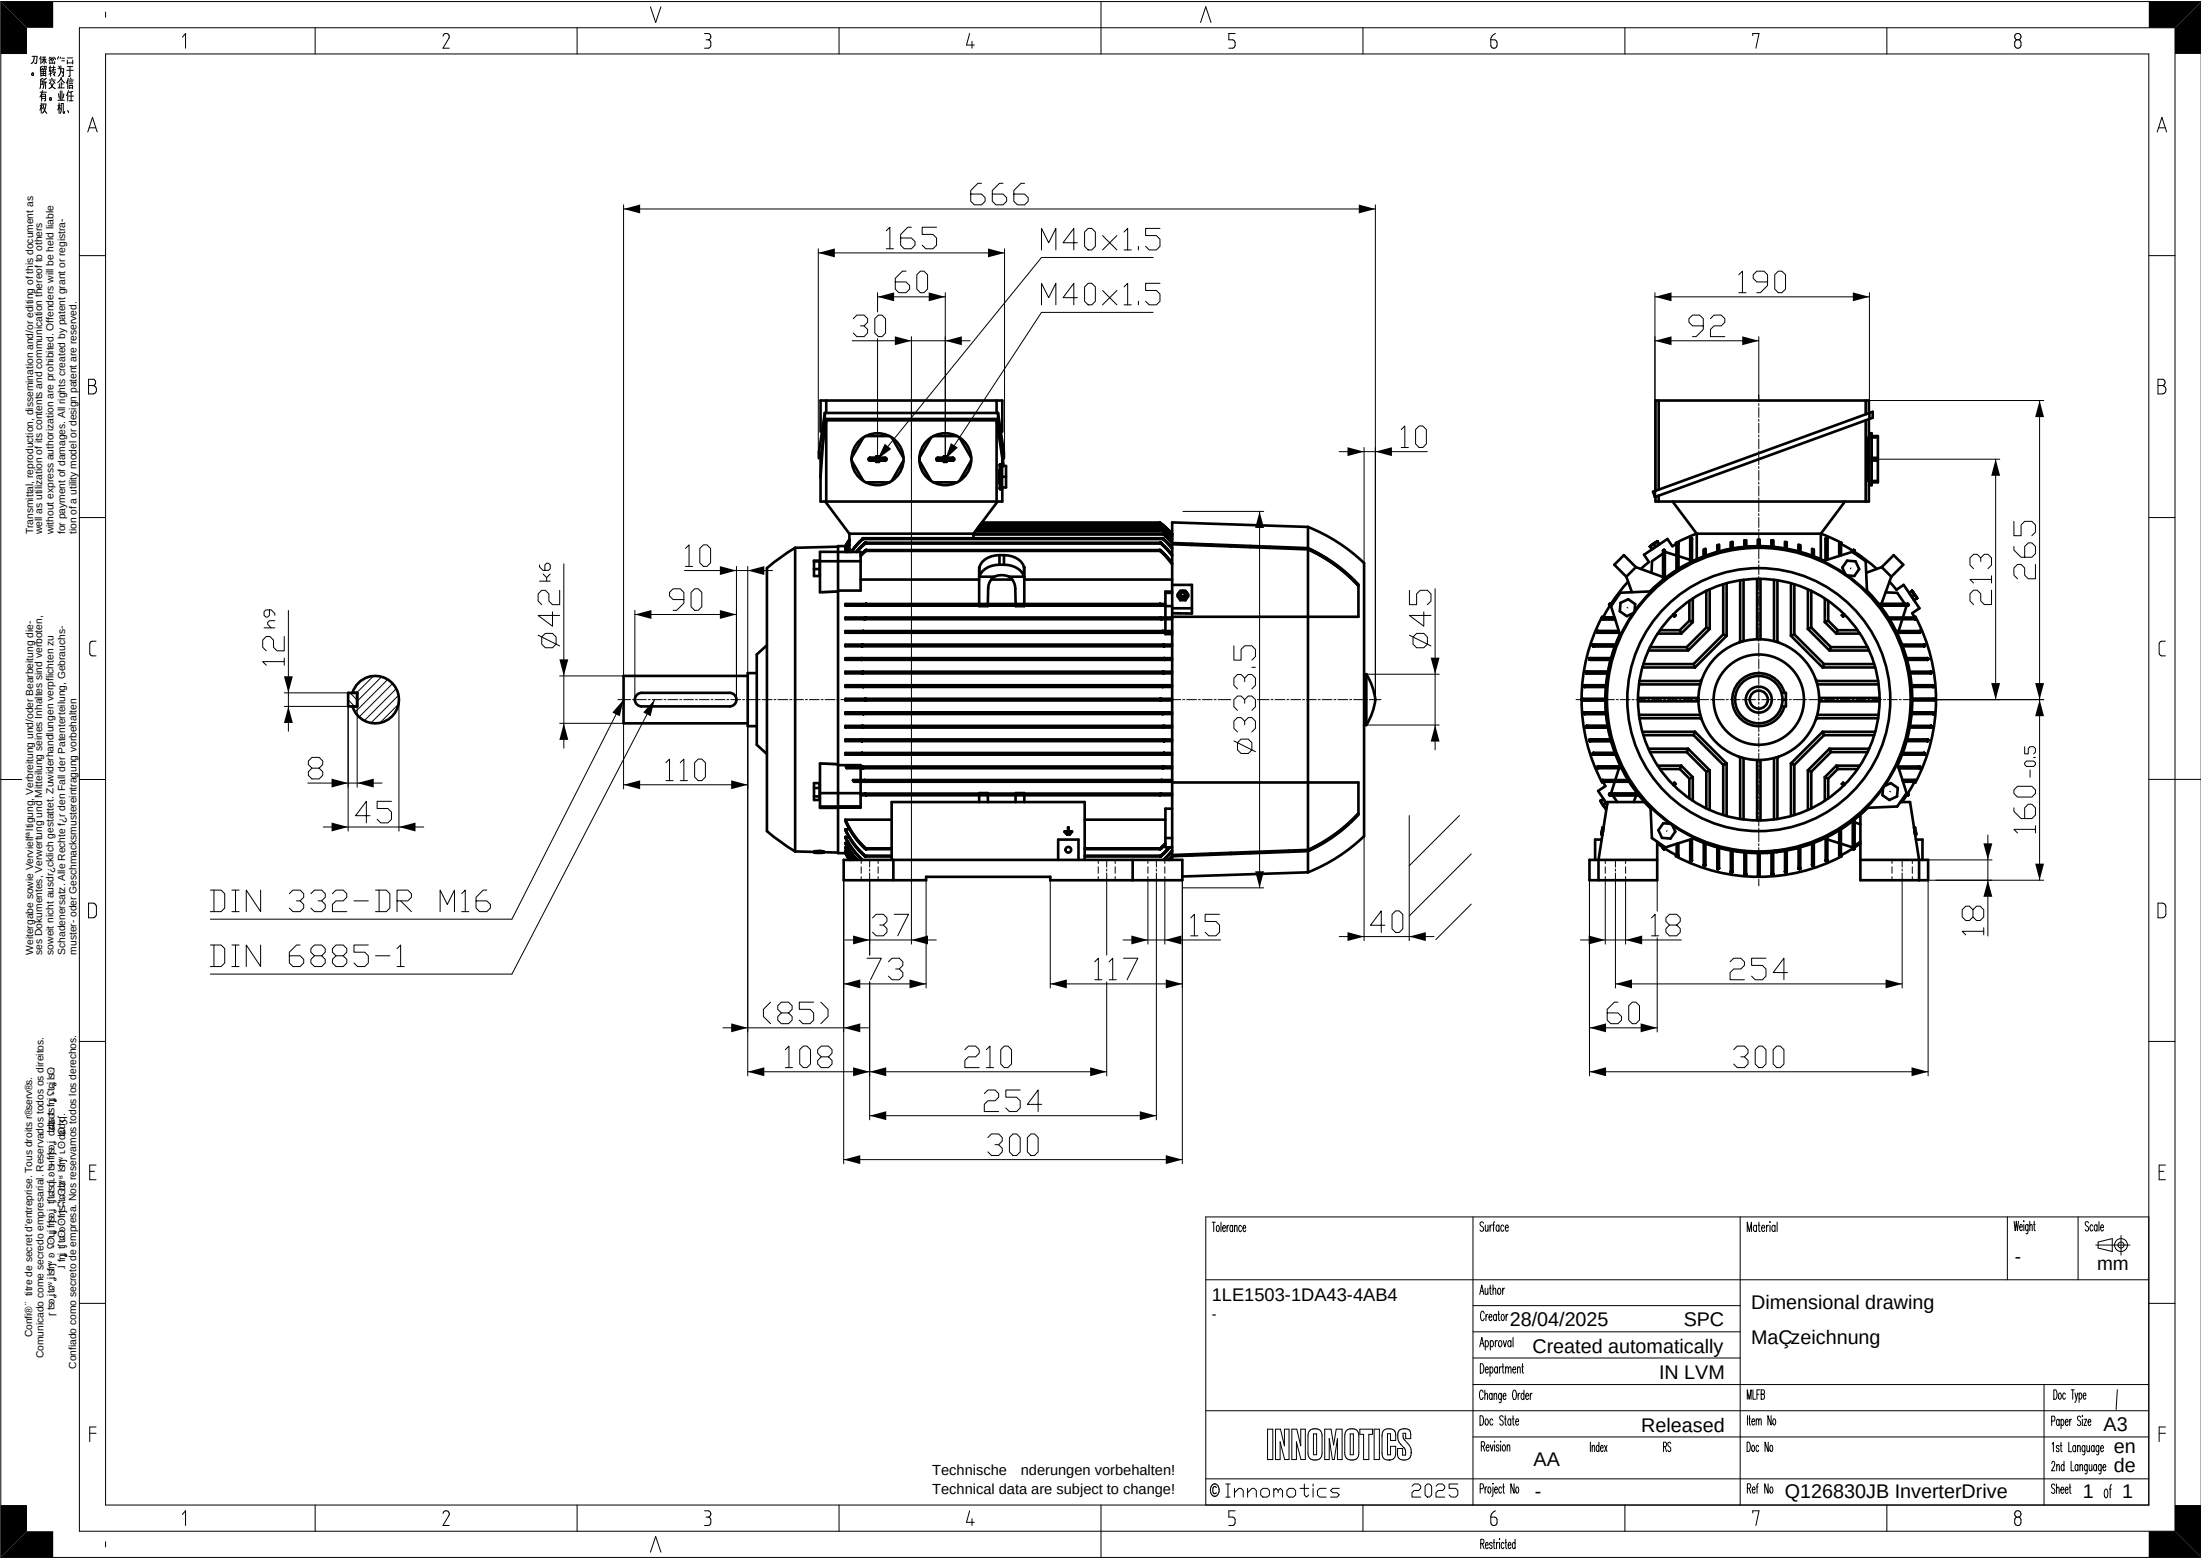

DIN 332-DR M16
DIN 6885-1

Technische nderungen vorbehalten!
Technical data are subject to change!

Tolerance	Surface	Material	Weight	Scale
1LE1503-1DA43-4AB4	Author	Dimensional drawing Maßzeichnung		
-	Creator 28/04/2025 SPC			
	Approval Created automatically			
	Department IN LVM			
INNOMOTICS	Change Order	MLFB	Doc. Type	
	Doc. State Released	Item No	Paper Size A3	
	Revision AA Index RS	Doc. No	1st Language en	
			2nd Language de	
©Innomotics 2025	Project No -	Ref No Q126830JB InverterDrive	Sheet 1 of 1	

Restricted