


CHANNEL 1 AND CHANNEL 2

Each channel is a differential amplifier. The standard unit has unity gain, and provision is made to allow extra resistors to be fitted in parallel to change the gains if required.

MODES OF OPERATION

- 1) Unity gain follower. Connect -I/P to common and signal into +I/P
- 2) Unity gain inverter. Signal into -I/P
- 3) Differential mode $V_{out} = (V_{in+}) - (V_{in-})$
- 4) High gain differential amp.




Note. The voltages at the op-amp inputs must stay within $\pm 12V$ for correct operation.

CHANNEL 3 AND CHANNEL 4


These are summing amplifiers each with one fixed unity gain input, and one variable input. The variable input is summed via a 50K preset and X 10 input, giving adjustment between 0 and X 10 gain. It also has a dropper resistor for high voltages via a 100K summed inverted signal is then summed with a variable offset signal of $\pm 2.5V$ and inverted again. All outputs have a capability of $\pm 10V$ and $\pm 10mA$. The outputs are short circuit proof to common. Power consumption 3 watts.




CHANNEL 1 DIFFERENTIAL AMPLIFIER

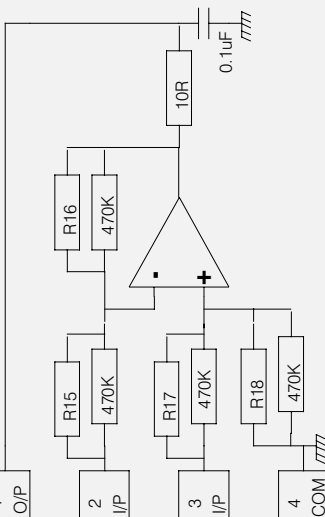

CHANNEL 2 DIFFERENTIAL AMPLIFIER

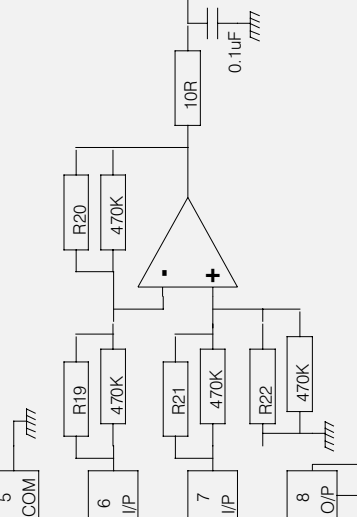

SUMMING CHANNEL 3

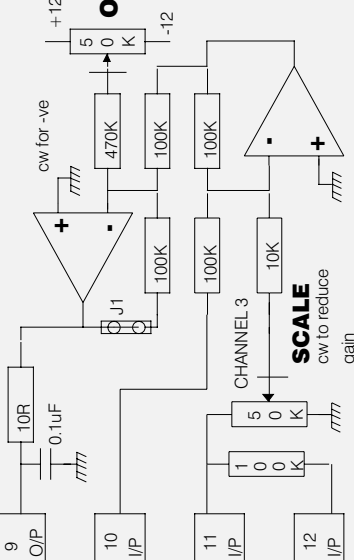

Dimensions 100mm X 96mm
Fixing centres 90mm X 86mm
(5mm in from each corner)
Use 4mm X 20mm screws.



POWER SUPPLY

The unit can be powered from an AC supply. The line input is on T24. The neutral is on T23 for supplies in the range 200 to 264 volts. The neutral is on T22 for supplies in the range 100 to 130 volts.


Regulated supply output is available. Maximum current output 25mA.

Terminal 21 for $\pm 12V$

Terminal 20 for $\pm 12V$

$\pm 24V$ unregulated is available on pads SQ2/1

CHANNEL 5 RAMP

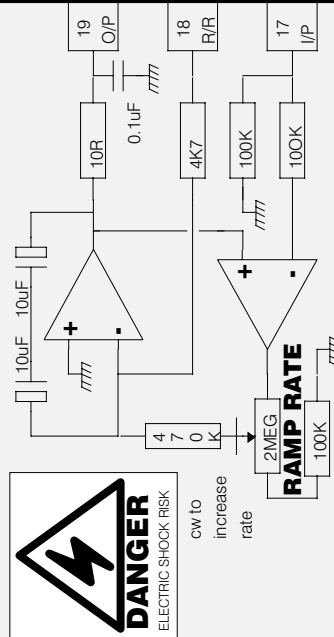

CHANNEL 5 Adjustable ramp

This channel can accept $\pm 10V$ signals. The ramp time is adjustable between 2 and 30 seconds for a 0 to $\pm 10V$ input. The output can be reset to zero by connecting R/R (T18) to O/P (T19).

CHANNEL 3 AND CHANNEL 4


These channels may also be configured as comparators by cutting the J link. The output op-amp will change state when the sum of the inputs equals zero. The offset preset may be used to adjust the threshold level.

Gain Change.

By substituting a resistor for the J link, the gain of the output op-amp may be increased.

UG101496 ISS11

The BUFFER CARD is a complex component only for professional assemblies. The unit is CE marked according to LVD 73/23/EEC amended 93/68/EEC. Follow these installation guidelines for EMC compatibility. Further measures may be necessary. Installers must have a level of technical competence to correctly install. The EMC behaviour is the responsibility of the manufacturer of the system or installation using this component. The BUFFER CARD is an analogue linear device with minimal noise emissions.



SPRINT ELECTRIC LTD. DOES NOT ACCEPT ANY LIABILITY WHATSOEVER FOR THE INSTALLATION, FITNESS FOR PURPOSE OR APPLICATION OF ITS PRODUCTS. IT IS THE USER'S RESPONSIBILITY TO ENSURE THE UNIT IS CORRECTLY USED AND INSTALLED. HEALTH AND SAFETY AT WORK: ELECTRICAL DEVICES CONSTITUTE A SAFETY HAZARD. IT IS THE RESPONSIBILITY OF THE USER TO ENSURE COMPLIANCE WITH ANY ACTS OR BYLAWS IN FORCE. ONLY SKILLED PERSONS SHOULD INSTALL THIS EQUIPMENT.