


TECHNICAL DATA

Single Phase Motors - Cap Start

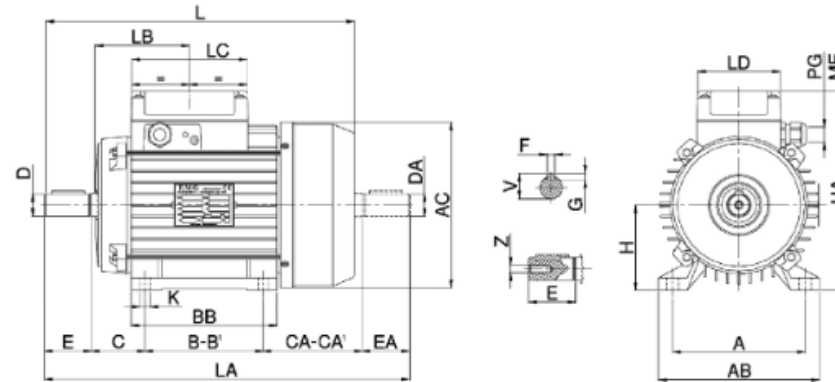

IM B3

MEC	INGOMBRO / OVERALL (mm)							PIEDI / FEET (mm)					ALBERO / SHAFT (mm)				COPERCHIO / TERMINAL-BOX (mm)				
	H	HA	L	LA	C	AC	CA	AB	BB	A	B	K	D/DA	E/EA	V	Z	LB	LC	LD	ME	PG
56	56	144	188	208	35	112	61	107	90	90	71	6	9	20	10,2	M 4	70	90	79	M12	9
63	63	158	207	230	38	127	65	120	100	100	80	7	11	23	12,5	M 4	78	101	79	M16	-
71	71	175	243	273	45	145	78	135	109	112	90	7	14	30	16	M 5	90	111	79	M16	-
80	80	195	280	326	51	159	95	152	125	125	100	9	19	40	21,5	M 6	101	123	88	M20	-
90S	90	210	305	360	56	177	105	170	131	140	100	10	24	50	27	M 8	102	123	88	M20	-
90L	90	210	330	386	56	177	105	170	155	140	125	10	24	50	27	M 8	104	123	88	M20	-
100L	100	234	363	432	61	193	111	192	171	160	140	12	28	60	31	M 10	92	90	90	M25	16
112M	112	262	383	460	68	220	115	220	183	190	140	13	28	60	31	M 10	104	112	112	M25	16
132S	132	310	458	552	87	260	165	260	180	216	140	13	38	80	41	M 12	111	112	112	M25/32	16/21
132M	132	310	497	592	87	260	165	260	218	216	178	13	38	80	41	M 12	111	112	112	M25/32	16/21
160M	160	383	613	742,5	111	310	201	/	318	261	254	210	/	14	42	110	45	M16	144	141	141
160L	160	383	657	786,5	111	310	201	/	318	305	254	254	/	14	42	110	45	M16	144	141	141
180	180	418	698	833	123	350	249	211	356	322	279	241	279	15	48	110	51,5	M16	158	141	141