



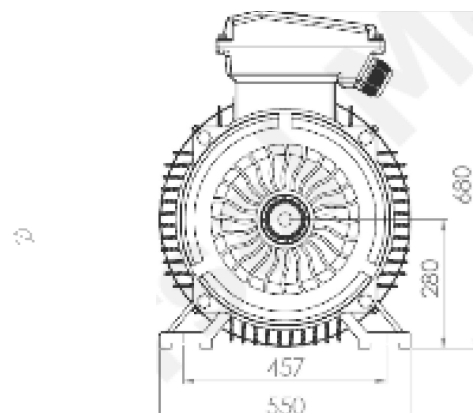

TECHNICAL DATA

Three Phase Electric Motors - Cast Iron Frame
UM3C 280M-4 IE3
 90 kW / 125 Cv
 1485 RPM

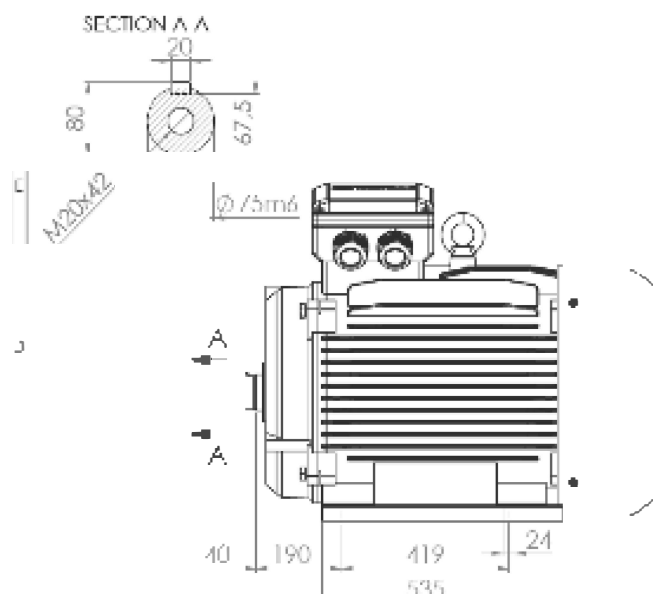

UNIVERSAL MOTORS			
Model	Power	Speed	Efficiency
UM3C 280M-4 IE3	90 kW	1485 RPM	95.2 %
UM3C 280M-4 IE3	125 Cv	1485 RPM	95.2 %
UM3C 280M-4 IE3	125 Cv	1485 RPM	95.2 %
UM3C 280M-4 IE3	125 Cv	1485 RPM	95.2 %

PE30 280M-4 B3

ATP 30280M41

Motor type:	UM3C 280M-4 IE3
Output:	90 kW / 125 Cv
Speed (min ⁻¹):	1485 RPM
Voltage:	400 V
Frequency:	50 Hz
Current:	155 A
Power factor (Cos Ø):	0.88
Poles:	4
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	94.5 %
Efficiency 75%:	95.4 %
Efficiency 100%:	95.2 %
Torque:	579 N.m
Tstarting/Tnominal:	2.0
Istarting/I nominal:	6.9
Tmaximum/Tnominal:	2.3
Noise:	80 Db(A)
Weight:	682 Kg
Bearing DE:	6317 C3
Bearing NDE:	6317 C3

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

* References applied only in the UK