


TECHNAL DATA

Three Phase Electric Motors - Aluminum Frame

UMA 71 M3 4

0.55 kW / 0.75 Cv

1380 RPM

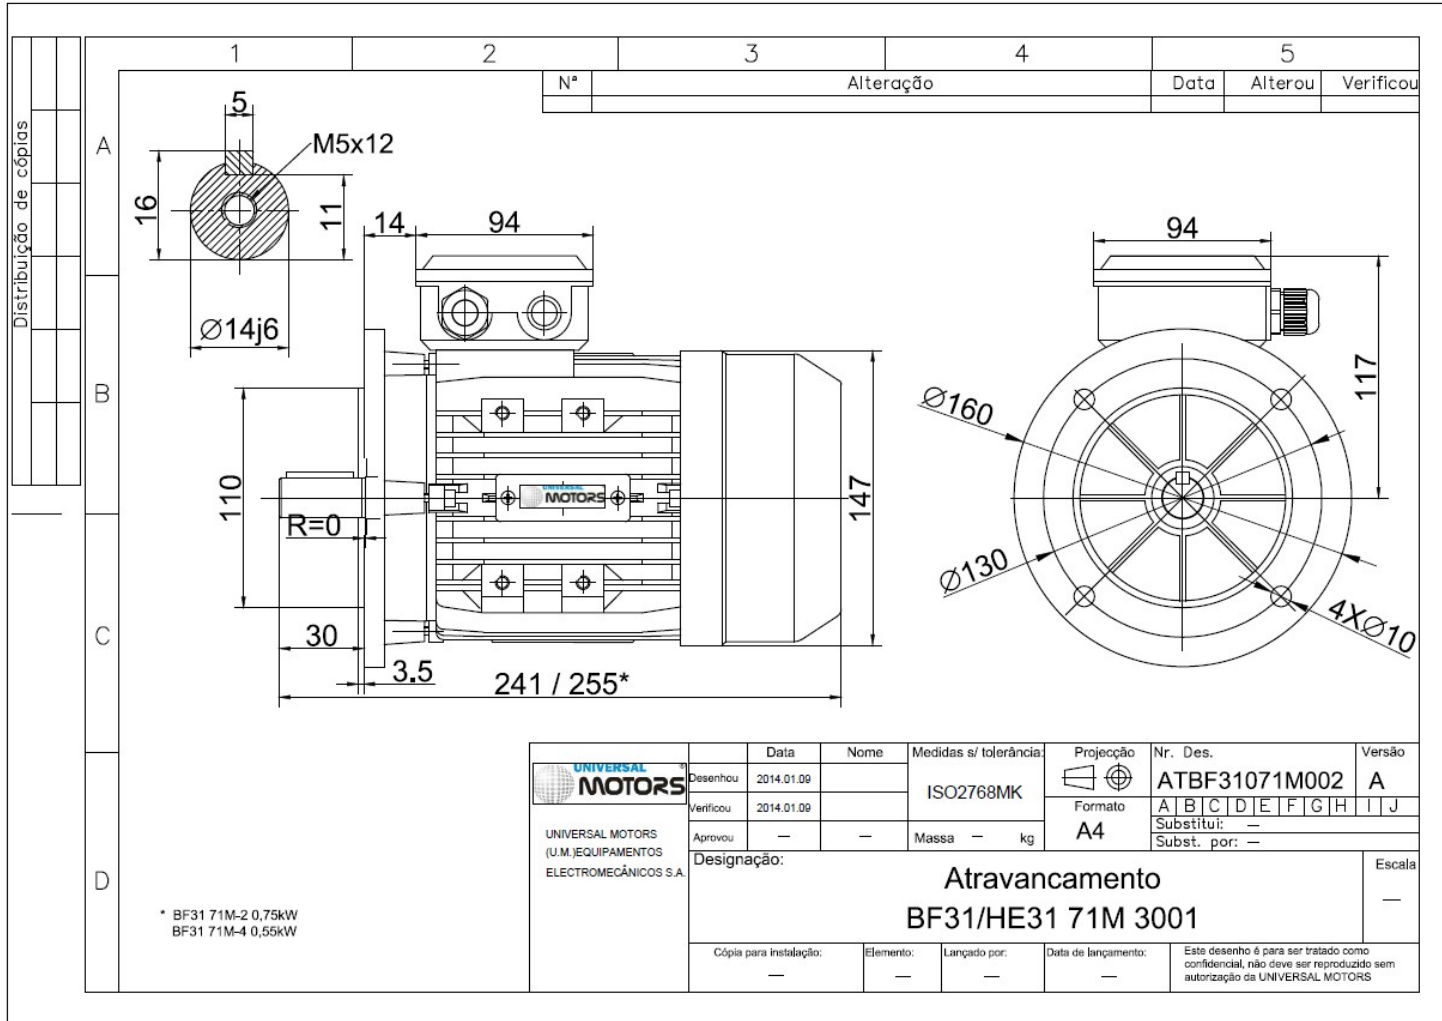

Motor type:	UMA 71 M3 4
Output:	0.55 kW / 0.75 Cv
Speed (min ⁻¹):	1380 RPM
Voltage:	400 V
Frequency:	50 Hz
Current:	1.60 A
Power factor (Cos Ø):	0.75
Poles:	4
Insulation class:	F
Temperature rise Class:	B
Efficiency 100%:	66.0 %
Torque:	3.8 N.m
Tstarting/Tnominal:	2.2
Istarting/Inominal:	6.0
Tmaximum/Tnominal:	2.4
Noise:	57 Db(A)
Weight:	6.5 Kg
Bearing DE:	6202 2Z
Bearing NDE:	6202 2Z

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

* References applied only in the UK