





Blocking device detail





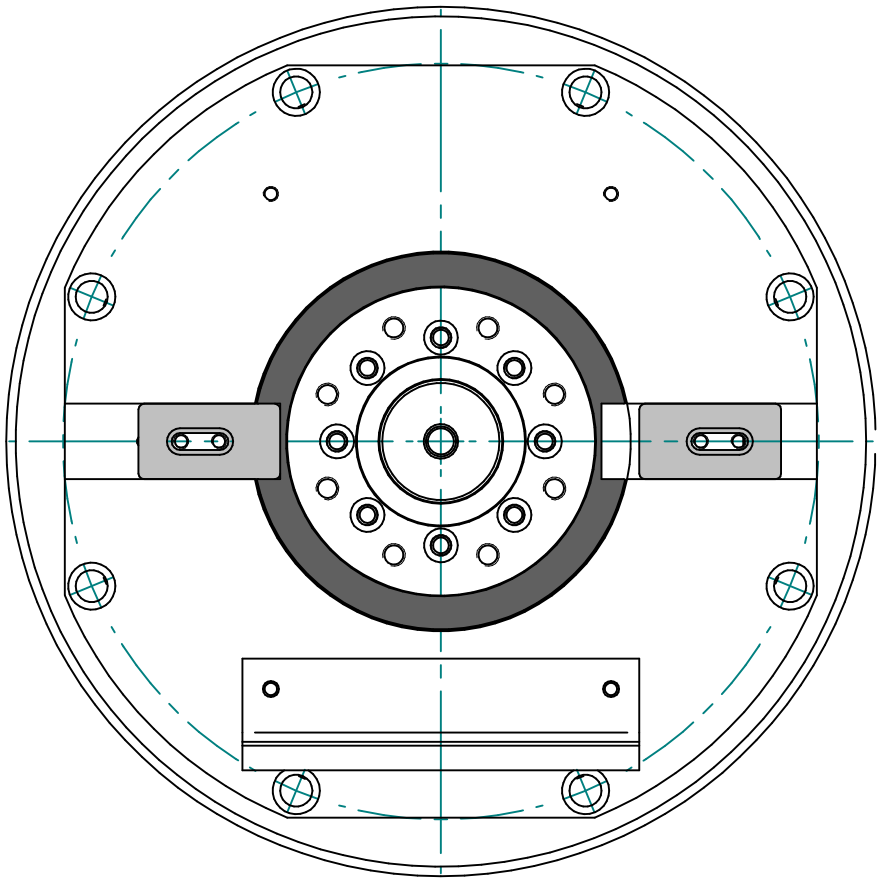

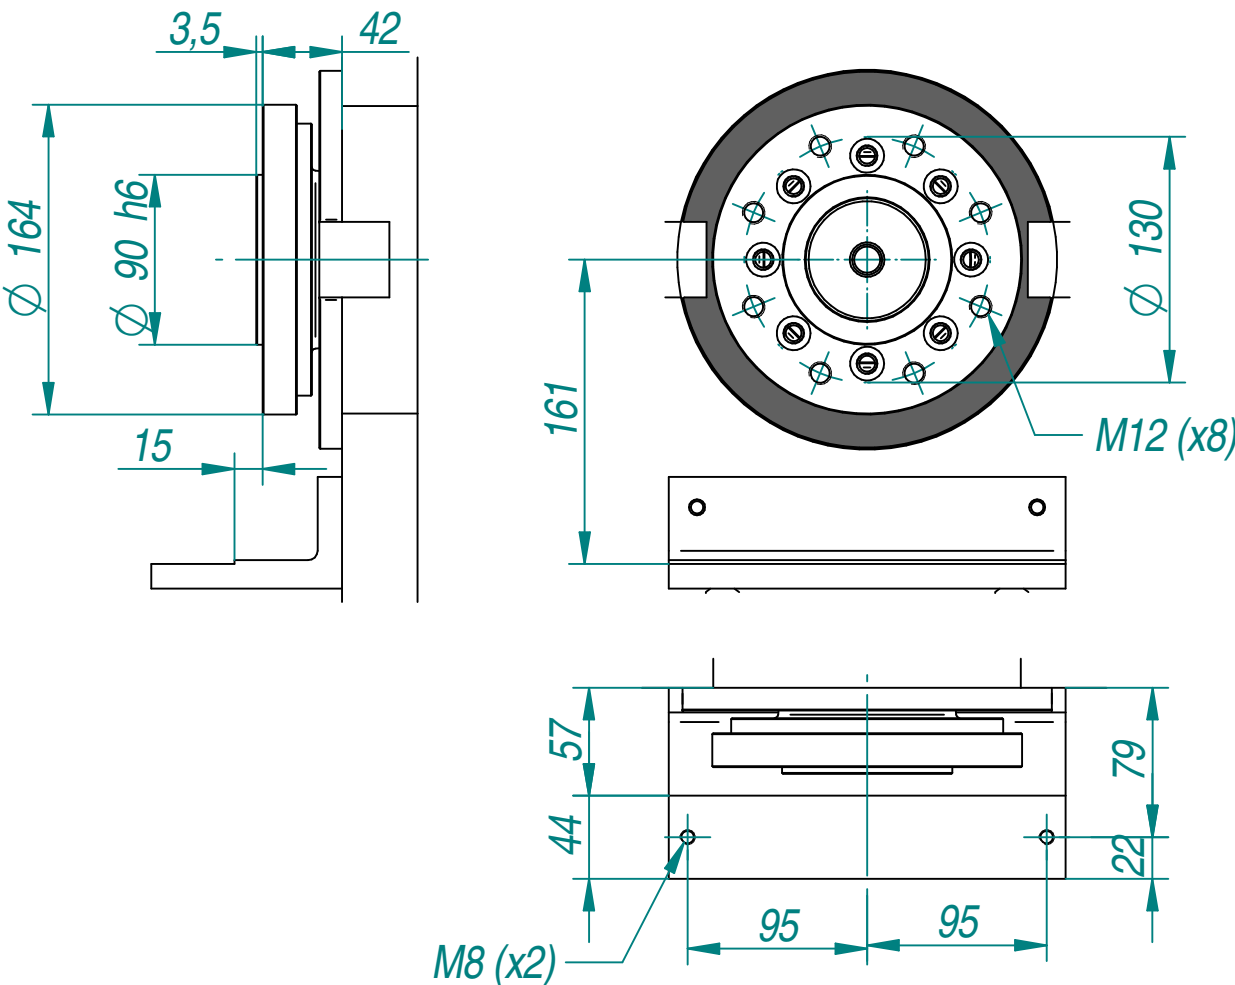

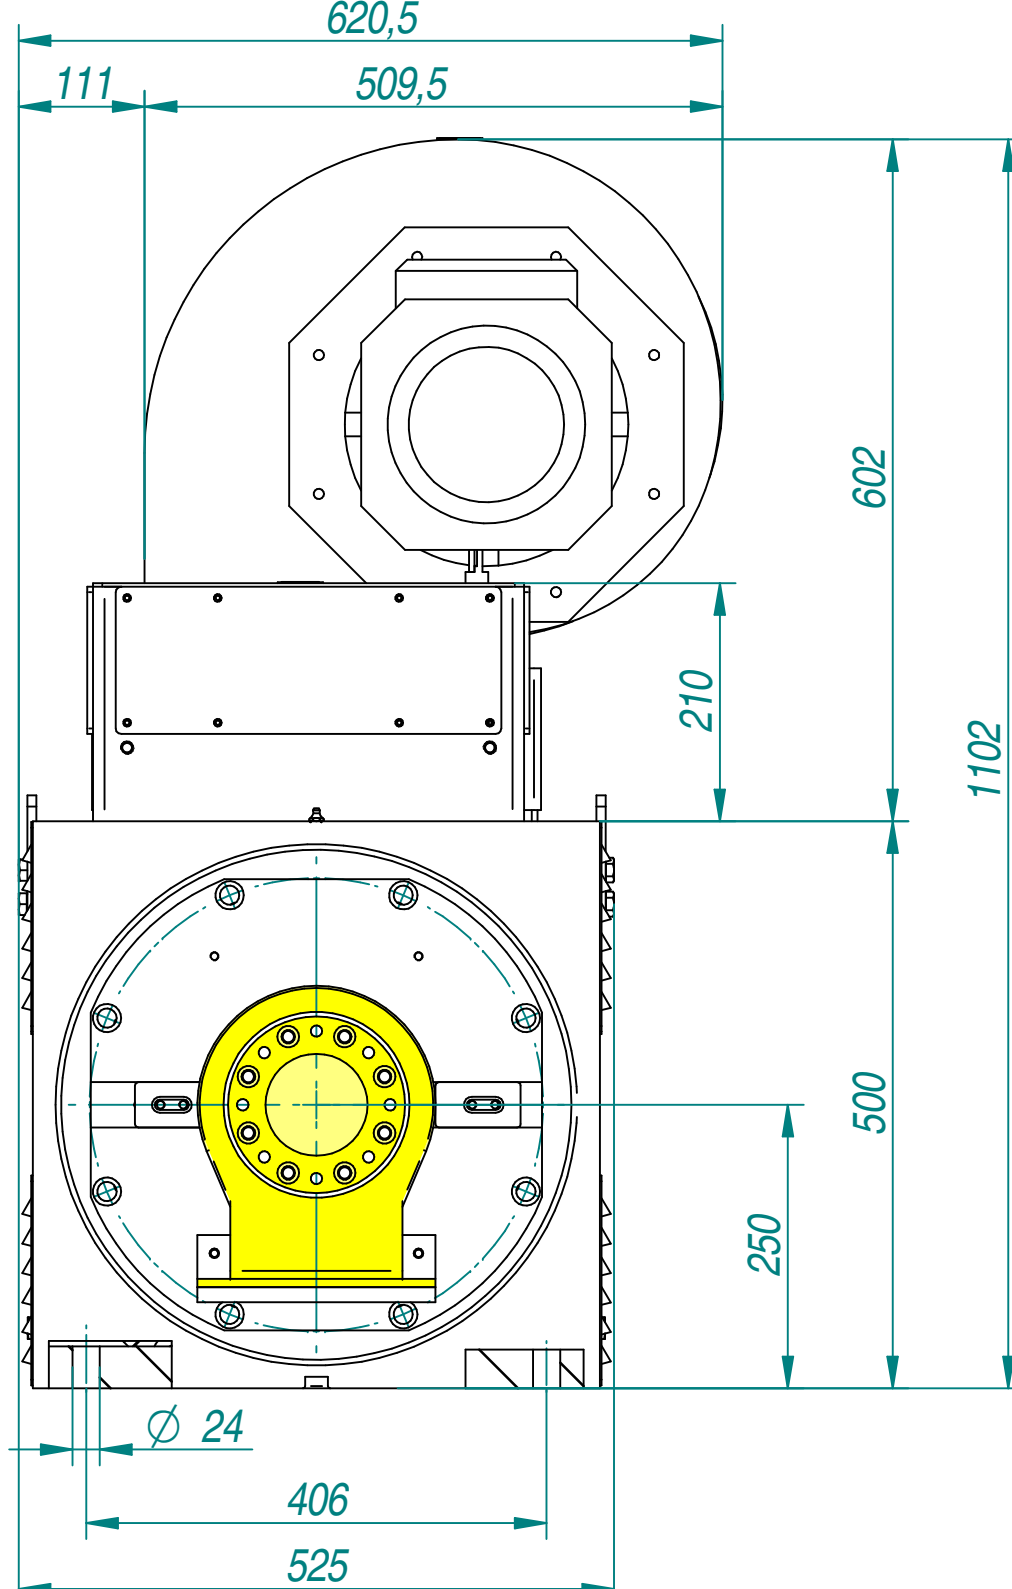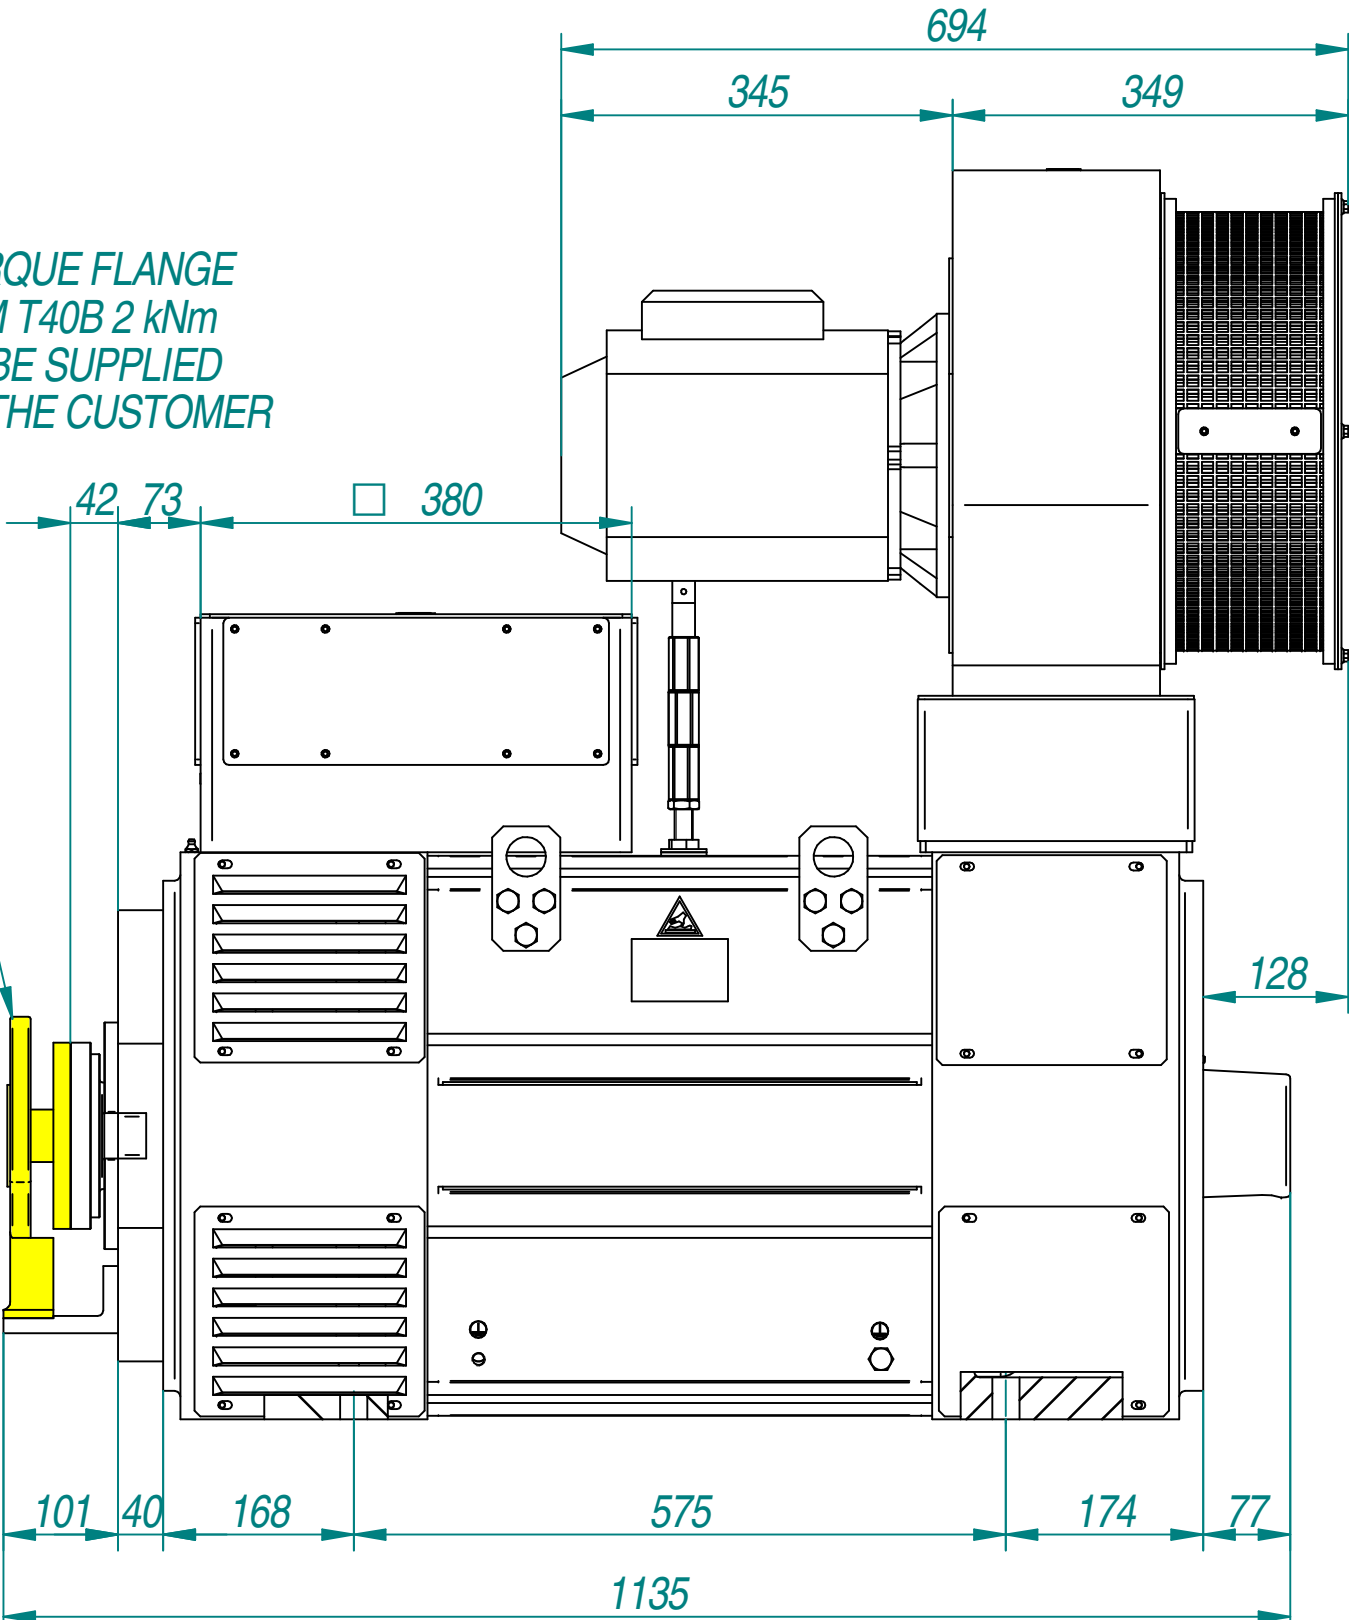Torque flange interface detail



TORQUE FLANGE
HBM T40B 2 kNm
TO BE SUPPLIED
BY THE CUSTOMER



EL CLIENTE ES RESPONSABLE DE QUE ESTA MÁQUINA SEA ADECUADA PARA LA APLICACIÓN PREVISTA / CUSTOMER IS RESPONSIBLE FOR THIS MACHINE IS BEING SUITABLE FOR THE INTENDED APPLICATION

FORMATO / FORMAT		ESCALA / SCALE	PÁGINA / PAGE
A2		1:5	1 de 1
CÓDIGO CODE EDICIÓN EDITION CR AF CLIENTE CUSTOMER	T25M2131		
	01 27/04/21		
	CR 922131		
	AF023-01		
	THE INVERTER DRIVE SUPERMARKET LTD CRM2186		
TIPO MOTOR MOTOR TYPE MONTAJE MOUNTING PROTECCIÓN PROTECTION REFRIGERACIÓN COOLING COLOR COLOUR DESCRIPCIÓN DESCRIPTION	MAC - QT 250 M		
	IM-B3		
	IP-23S		
	IC-06		
	RAL-7035 EPOXI		
	MOTOR DIMENSIONS		
EMBALAJE PACKAGING	TIPO-CÓDIGO TYPE-CODE	700524	
	MATERIAL	Phytosanitary wooden box	
	PESO WEIGHT	1180 + 78 Kg	
	DIMENSIONES DIMENSIONS	1600 x 790 x 1470 mm	
	ELABORA		
	REVISAR		
	APRUEBA		
<div> VASCAT</div>			
MÉTODO DE PROYECCIÓN 			
TOLERANCIAS POR DEFECTO	0 ----- 6 ± 0.1 mm		
	6 ----- 30 ± 0.2 mm		
	30 ----- 120 ± 0.3 mm		
	120 ----- 500 ± 0.5 mm		
	TOLERANCIA ANGULAR ± 1º		
	DISTANCIA ENTRE AGUJEROS ± 0.2 mm		
	 ⊥ // ↗ 0.1 mm		
	RUGOSIDADES		
	0.0125 - 0.0032 mm 		
	0.0032 - 0.0008 mm 		
	0.0008 - 0.0001 mm 		
MATAR CANTOS VIVOS A 0.2x45º			