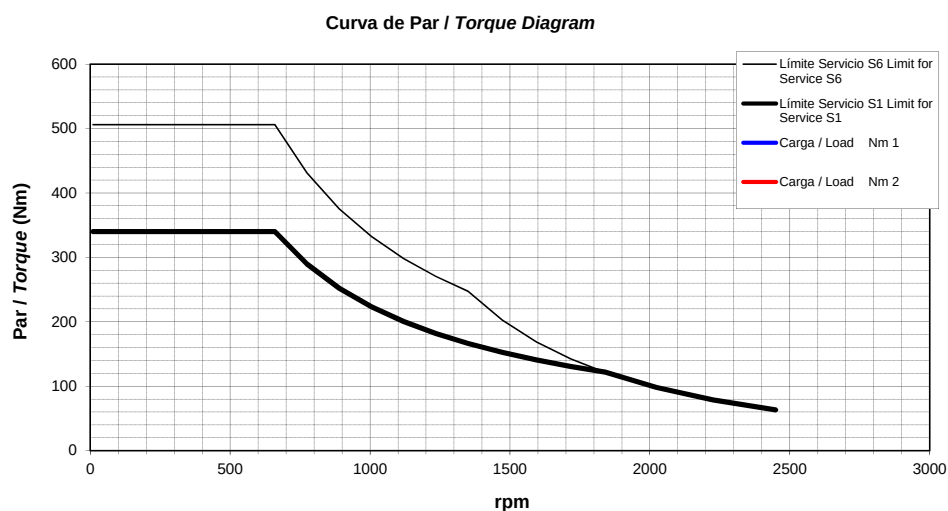


Ventilador / Fan			Rodamientos <i>Bearings</i>		Delantero <i>Drive End</i>		6312 ZZ C3		Trasero <i>Non Drive End</i>		6310 ZZ C3					
Tensión / <i>Voltage</i>	230/400 V	460 V	Momento de inercia <i>Rotor Inertia</i>					J = 0,239 Kg m ²		Peso Motor <i>Motor Weight</i>			230 Kg			
Frec. / <i>Frequency</i>	50 Hz	60 Hz	Protección <i>Protection Degree</i>					IP 23		Construcción <i>Mounting</i>			IM B3 / B35	Refrigeración <i>Cooling</i>	IC06	
Potencia / <i>Power</i>	0,75 KW	0,86 KW	Velocidad / <i>Speed</i>					2850 rpm		3350 rpm		Caudal / <i>Air flow</i>			1200 m3/h	
Presión / <i>Pressure</i>	800 Pa		Nivel de ruido <i>Noise Level</i>					< 80 dB		Velocidad máxima mecánica <i>Max. Mechanical Speed</i>					5000 rpm	
Equilibrado grado <i>Balancing degree</i>	A		Aislamiento Clase <i>Insulation Class</i>		F		Protección Térmica <i>Thermal Protection</i>			PTC 140 °C		Ambiente <i>Ambient</i>			< 40 °C	< 1000 m
Freno de Bloqueo (opcional) <i>Holding Brake (optional)</i>			300 Nm		24 Vdc		2.5 A		60 W		18 Kg		J = 0.0017 Kg m ²			
Tensión de Base del Motor <i>Motor Base Voltage</i>			Vb		400 V		Tensión Máxima de Salida del Convertidor <i>Inverter max. Output Voltage</i>					Vc		400 V		

	Servicio / Service S1						Servicio / Service S6 - 40%						
Bobinado Winding	Nm	A	KW	rpm	Hz	Velocidad a Pot.Cte Const. Power Speed. (rpm)	Nm	A	KW	rpm	Hz	Velocidad a Pot.Cte Const. Power Speed. (rpm)	Corriente en vacío No Load Current (A)
B41	340	44	23.5	660	23	1840	506	63	35.0	660	23	1350	15

[illegible][illegible]