

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer		: IDS	
Product line		: W22 IE3 Three-Phase	Product code : 12862390
Frame	: 132S	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 7.5 kW	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 50 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 400/690 V	Altitude	: 1000 m.a.s.l.
Rated current	: 14.1/8.17 A	Protection degree	: IP55
L. R. Amperes	: 120/69.5 A	Cooling method	: IC411 - TEFC
LRC	: 8.5	Mounting	: B3T
No load current	: 5.80/3.36 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 2925 rpm	Noise level <sup>2</sup>	: 63.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 2.50 kgfm	Approx. weight <sup>3</sup>	: 66.8 kg
Locked rotor torque	: 300 %		
Breakdown torque	: 330 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0234 kgm <sup>2</sup>		
Design	: N		
Output	50%	75%	100%
Efficiency (%)	88.5	89.8	90.3
Power Factor	0.68	0.80	0.85
Foundation loads			
Max. traction		: 108 kgf	
Max. compression		: 174 kgf	
Bearing type		: <u>Drive end</u>	: <u>Non drive end</u>
Sealing		: 6308 ZZ	: 6207 ZZ
Lubrication interval		: V'Ring	: V'Ring
Lubricant amount		: -	: -
Lubricant type		: Mobil Polyrex EM	
Notes			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.	
Rev.	Changes Summary		Date
Performed by			Page
Checked by			Revision
Date	25/06/2019		1 / 2

# VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : IDS

Product line : W22 IE3 Three-Phase

Product code : 12862390

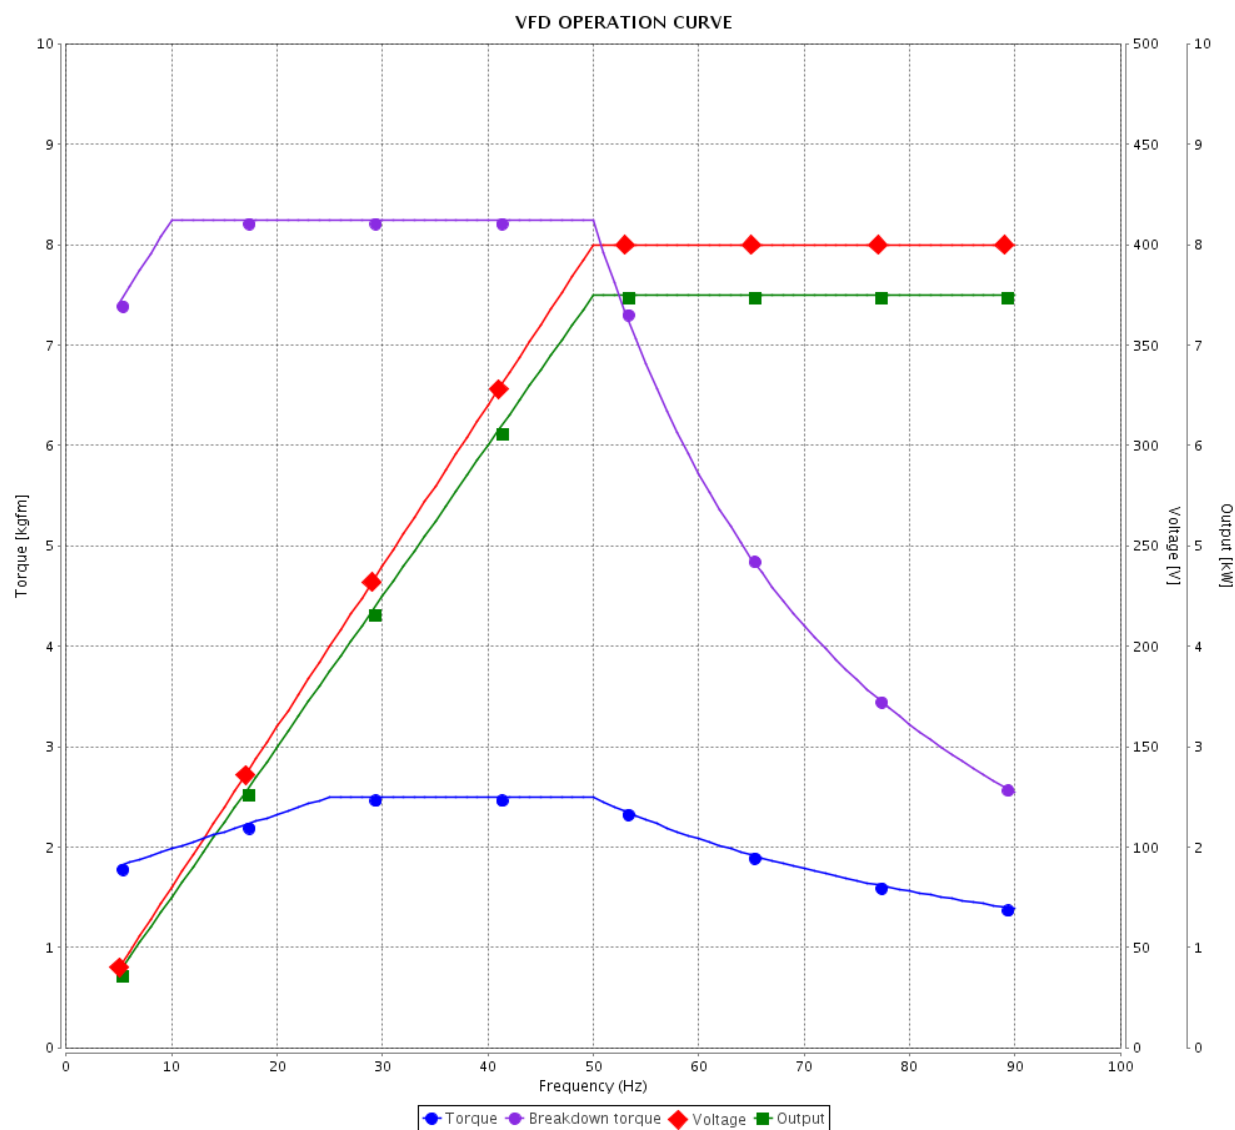

Performance : 400/690 V 50 Hz 2P

Rated current : 14.1/8.17 A  
 LRC : 8.5  
 Rated torque : 2.50 kgfm  
 Locked rotor torque : 300 %  
 Breakdown torque : 330 %  
 Rated speed : 2925 rpm

Moment of inertia (J) : 0.0234 kgm<sup>2</sup>  
 Duty cycle : S1  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	25/06/2019			