


Line Choke Installation Drawings

IMPORTANT

Always use the specified ac line choke with the Drive.

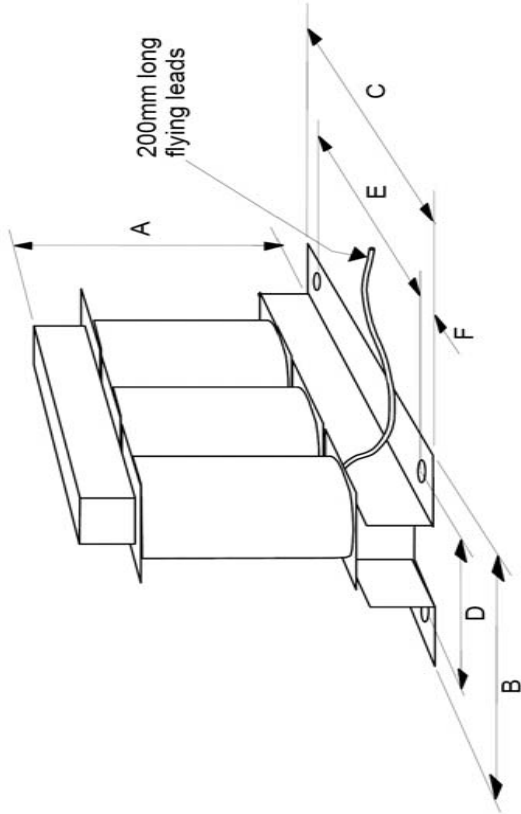

Parker Part Number	Drive Rating	Weight (kg)	Dimensions (mm)						Mtg Hole Ø	Terminal Ø	
			A	B	C	D	E	F			
For use without EMC Filters											
Frame 1											
CO466448U015	15A	1	67	60	80	40	64	8	7		M8
CO466448U040	35A	2.5	127	70	155	48	140	7.5	7		M8
Frame 2											
CO466448U040	40A	2.5	127	70	155	48	140	7.5	7		M8
CO466448U070	70A	4.5	127	85	155	63	140	7.5	7		M8
CO466448U110	110A	7.5	160	100	190	75	170	10	9		M8
CO466448U165	165A	7.5	160	102	190	76	170	10	9		M8
For use with EMC filters											
Frame 1											
CO466449U015	15A	4.5	127	90	155	68	140	7.5	7		M8
CO466449U040	35A	8	160	100	190	75	170	10	9		M8
Frame 2											
CO466449U040	40A	8	160	100	190	75	170	10	9		M8
CO466449U070	70A	10	160	105	190	83	170	10	9		M8
CO466449U110	110A	14	160	125	190	103	170	10	9		M8
CO466449U165	165A	28	225	200	240	176	150	45	15		M8