



Pay Attention When Working(Danger)

- ### Front Side Of Panel Mounting Method

- A position(2 places): $\varnothing 3.6$ hole



Panel Cut-Out Dimensions



Back Side Of Panel Mounting Method

Note) About the part of panel mounting, please see the part table (the following table).

1. Please cut the panel and follow the right figure.

*B position (4 places):

· Order code: in the case of 100-203-008, $\varnothing 4.8$ hole

· Order code: in the case of 100-203-009, M4 welding stud

2. Please fix the keypad to the plate part in the back side of the panel as the following figure.

· In the case of screw fixation on the panel front side:

Order code: 100-203-008

(the panel thickness 1~1.6mm use)


· In the case of M4 welding stud on the panel back side:

Order code: 100-203-009


Front



Right Side

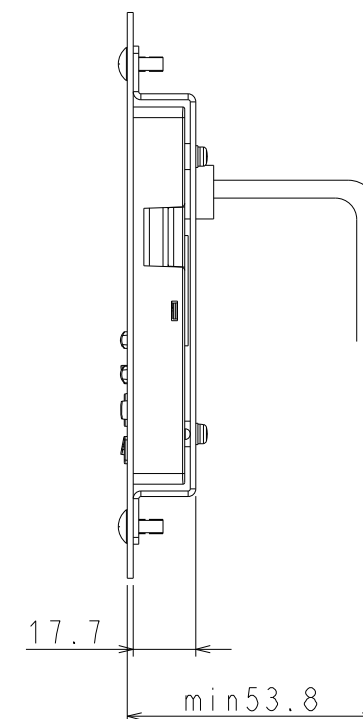


Back

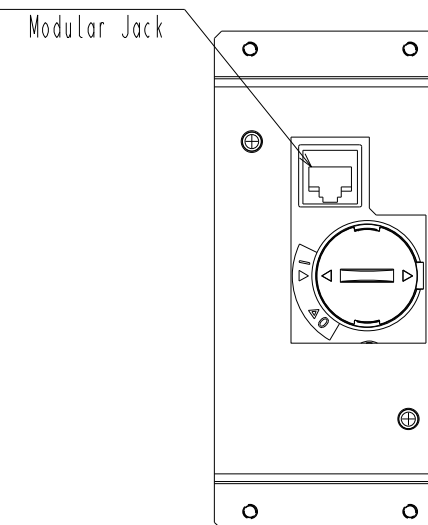


Mounting Detail Of Plate Part Attachment

M4×10
Cross Recessed
Truss Screw (4 Places)

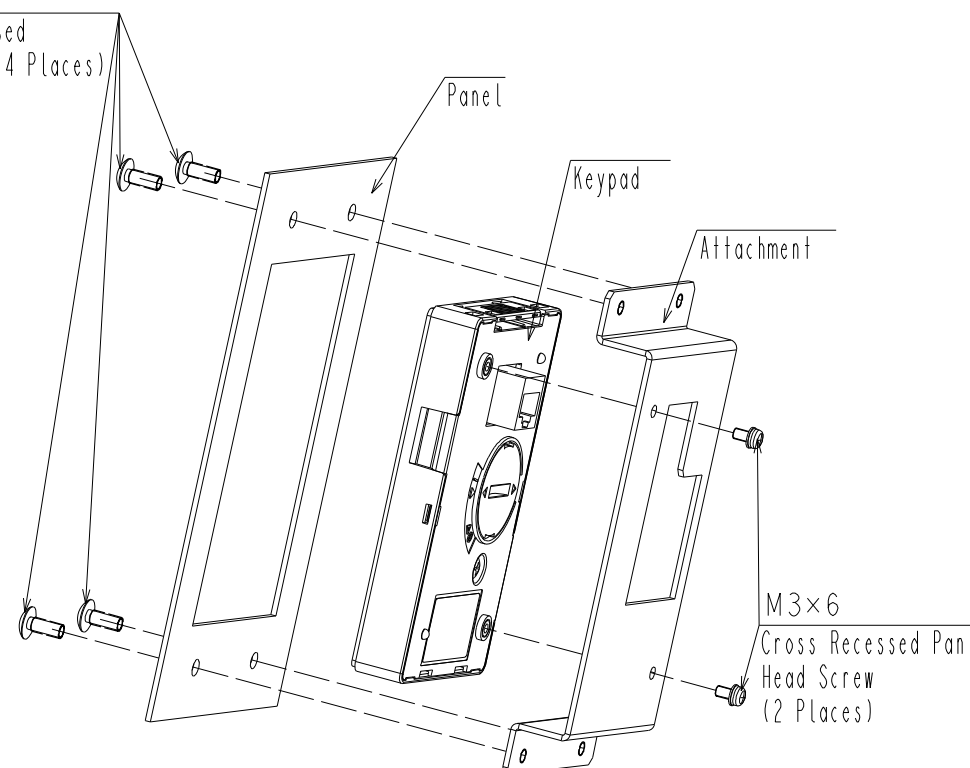

Panel Cut-Out Dimensions

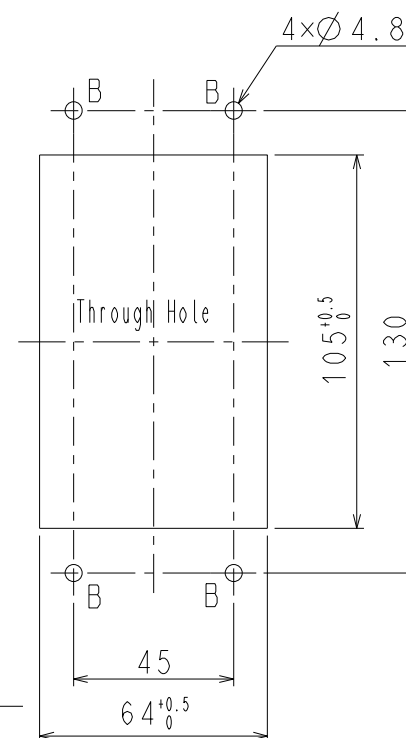

Order Code	Model	Part Name	Code No.	QTY	Remarks
100-203-008	900-192-933-001	Attachment	400-093-632-011	1	Case Of Screw Fixation
		M3×6 Cross Recessed Pan Head Screw	SCAT41246-1	2	
		M4×10 Cross Recessed Truss Screw	SCAT41405-1	4	
100-203-009	900-192-933-002	Attachment	400-093-632-012	1	Case Of Welding Stud On The Panel (Nut Fixation)
		M3×6 Cross Recessed Pan Head Screw	SCAT41246-1	2	
		M4 Washer	SCBT41023-5	4	
		M4S Washer	SCBT41022-5	4	
		M4 Nut	SCAT41264-4	4	