

URR/URGL/URU/URGM

SEMICONDUCTOR PROTECTION FUSES



PROTISTOR® FUSES

690V

URR/URGL/URU/URGM from 75 to 800A

SIZES: 36 X 55 & 2 X 36 X 55

Features/Benefits

- **Extremely high Interrupting rating Fuses:**
Protection of power Semiconductors according to IEC 269.1 and 4
- **690V Voltage Rating** according to IEC 33
- **gR Class** Ratings from 75 to 800A according to VDE 636-23 and IEC 269.4
- **Three Models** complying with BS 88-4
 - without indicator
 - with external trip-indicator
 - with built in trip-indicator

D



APPLICATIONS DATA

Voltage rating U_N (V)	Size	Class	Current rating I_N (A)	Melting I_2t @ 1 ms I_2t_p (A ² s)	Total clearing I_2t @ U_N A ² s		Watt losses		Tested interrupting rating
					$I_p \leq 50 I_N$	$I_p > 50 I_N$	$0.8 I_N$	I_N	
690V	36x55	URR	75	350	1800	2000	9.7	19.5	200 kA @690V
			110	1180	6000	6700	11.3	22.8	
			200	3900	18500	20500	21.8	41.4	
			250	8760	41000	46000	23.6	44.1	
		URGL	50	180	860	990	7.3	14.0	200 kA @690V
			65	335	1600	1840	8.8	17.1	
			85	480	3450	4000	12.2	23.5	
			90	720	4100	4700	13.2	25.5	
			150	2880	12600	14500	18.9	35.3	
			180	5350	22500	25500	19.1	35.7	
			200	9510	40000	46000	17.7	33.1	
			250	21400	97000	110000	18.7	34.5	
			280	29100	125000	145000	20.3	38.0	
			315	38100	157000	180000	22.7	42.6	
	2x36x55	URU	355	48200	190000	215000	25.9	48.5	200 kA @690V
			400	72000	265000	305000	26.7	50.0	
			200	4700	24000	27000	18.4	33.0	
			235	6920	34500	39000	21.0	37.6	
			400	21200	100000	110000	34.8	62.3	
		URGM	500	35000	164000	184000	47.2	88.2	200 kA @690V
			630	97300	515000	575000	41.1	73.2	
			175	2880	13800	16000	24.7	47.6	
			300	13700	60000	68000	31.5	59.0	
			325	21400	90000	102000	30.0	54.0	
			355	25200	106000	120000	33.1	62.0	
			450	65600	300000	340000	34.6	63.8	
			500	85600	390000	440000	37.4	69.0	
			630	152000	630000	720000	45.4	85.2	
			710	193000	760000	860000	51.8	97.0	
			800	282000	1.06 10 ⁶	1.22 10 ⁶	53.4	100.0	



URR/URGL/URU/URGM SEMICONDUCTOR PROTECTION FUSES

PART NUMBERS

CP 36x55 - Without trip-indicator




CP 36x55 - With built-in trip-indicator

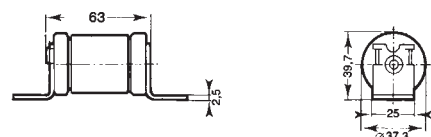


Microswitch MC 36 GR 2.5 N - Ref. P 092496

CP 36x55 - With separated trip-indicator

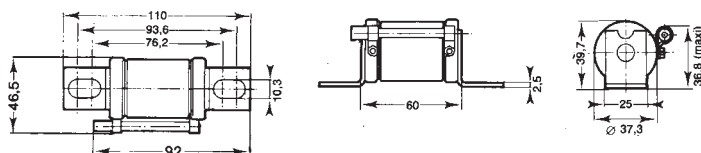


Microswitch MC 6.3 GR 2.5 N - Ref. Y 310015

CP 2x36x55 - Without trip-indicator

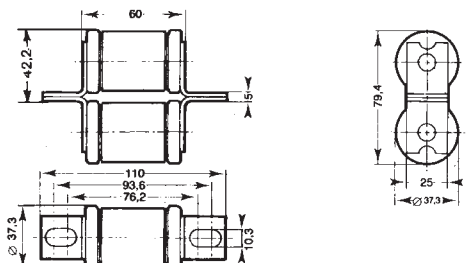

CP 2x36x55 - With built in trip-indicator

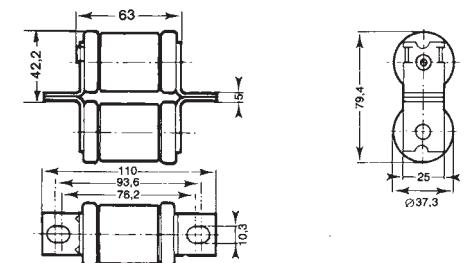

Microswitch MC 36 GR 2.5 N - Ref. P 092496

SIZE	CATALOG NO.	REF#
36x55	6.9 URGL 36/50	X 097103
	6.9 URGL 36/65	H 097113
	6.9 URR 36/75	H 097136
	6.9 URGL 36/85	M 097163
	6.9 URGL 36/90	N 097164
	6.9 URR 36/110	P 097165
	6.9 URGL 36/150	Q 097166
	6.9 URGL 36/180	R 097167
	6.9 URR 36/200	S 097168
	6.9 URGL 36/200	T 097169
	6.9 URR 36/250	V 097170
	6.9 URGL 36/250	W 097171
	6.9 URGL 36/280	A 097175
	6.9 URGL 36/315	B 097176
	6.9 URGL 36/355	C 097177
	6.9 URGL 36/400	D 097178

SIZE	CATALOG NO.	REF#
36x55	6.9 URGL 36 T 50	N 097210
	6.9 URGL 36 T 65	K 097230
	6.9 URR 36 T 75	H 099965
	6.9 URGL 36 T 85	M 097255
	6.9 URGL 36 T 90	N 097256
	6.9 URR 36 T 110	R 099973
	6.9 URGL 36 T 150	Z 082178
	6.9 URGL 36 T 180	P 097257
	6.9 URR 36 T 200	A 085560
	6.9 URGL 36 T 200	R 097259
	6.9 URR 36 T 250	W 097263
	6.9 URGL 36 T 250	X 097264
	6.9 URGL 36 T 280	Y 097265
	6.9 URGL 36 T 315	Z 097266
	6.9 URGL 36 T 355	A 097267
	6.9 URGL 36 T 400	C 097269

SIZE	CATALOG NO.	REF#
36x55	6.9 URGL 36 P 90	H 097182
	6.9 URR 36 P 110	J 097183
	6.9 URGL 36 P 150	K 097184
	6.9 URGL 36 P 180	L 097185
	6.9 URR 36 P 200	M 097186
	6.9 URGL 36 P 200	N 097187
	6.9 URR 36 P 250	P 097188
	6.9 URGL 36 P 250	Q 097189
	6.9 URGL 36 P 280	R 097190
	6.9 URGL 36 P 315	V 097193
	6.9 URGL 36 P 355	Y 097196
	6.9 URGL 36 P 400	M 097209

SIZE	CATALOG NO.	REF#
2x36x55	6.9 URG M 236/175	D 097270
	6.9 URU 236/200	F 097272
	6.9 URU 236/235	J 097275
	6.9 URG M 236/300	K 097276
	6.9 URG M 236/325	R 097282
	6.9 URG M 236/355	S 097283
	6.9 URU 236/400	T 097284
	6.9 URG M 236/450	Y 097288
	6.9 URG M 236/500	Z 097289
	6.9 URU 236/500	A 097290
	6.9 URG M 236/630	B 097291
	6.9 URU 236/630	R 097351
	6.9 URG M 236/710	S 097352
	6.9 URG M 236/800	Y 097357

SIZE	CATALOG NO.	REF#
2x36x55	6.9 URG M 236 T 175	F 097456
	6.9 URU 236 T 200	G 097457
	6.9 URU 236 T 235	A 082179
	6.9 URG M 236 T 300	S 085553
	6.9 URG M 236 T 325	J 097459
	6.9 URG M 236 T 355	N 097463
	6.9 URU 236 T 400	P 097464
	6.9 URG M 236 T 450	Q 097465
	6.9 URG M 236 T 500	R 097466
	6.9 URU 236 T 500	S 097467
	6.9 URG M 236 T 630	V 097469
	6.9 URU 236 T 630	W 097470
	6.9 URG M 236 T 710	C 097476
	6.9 URG M 236 T 800	D 097477