

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer		: IDS	
Product line		: W22 IE3 Three-Phase	Product code : 12936531
Frame	: 71	Locked rotor time	: 54s (cold) 30s (hot)
Output	: 0.37 kW	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 50 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/400 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.72/0.987 A	Protection degree	: IP55
L. R. Amperes	: 8.24/4.74 A	Cooling method	: IC411 - TEFC
LRC	: 4.8	Mounting	: B35T
No load current	: 1.13/0.650 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1385 rpm	Noise level ²	: 43.0 dB(A)
Slip	: 7.67 %	Starting method	: Direct On Line
Rated torque	: 0.260 kgfm	Approx. weight ³	: 12.3 kg
Locked rotor torque	: 280 %		
Breakdown torque	: 290 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0008 kgm ²		
Design	: N		
Output	50%	75%	100%
Efficiency (%)	73.0	75.0	77.3
Power Factor	0.50	0.62	0.70
Foundation loads			
Max. traction		: 20 kgf	
Max. compression		: 32 kgf	
Bearing type		Drive end	Non drive end
Sealing		6202 ZZ	6202 ZZ
Lubrication interval		Oil Seal	Oil Seal
Lubricant amount		-	-
Lubricant type		Mobil Polyrex EM	
Notes			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.	
Rev.	Changes Summary		Performed
Performed by			Checked
Checked by			Date
Date	10/07/2019		Page
			Revision
			1 / 2

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : IDS

Product line : W22 IE3 Three-Phase

Product code : 12936531

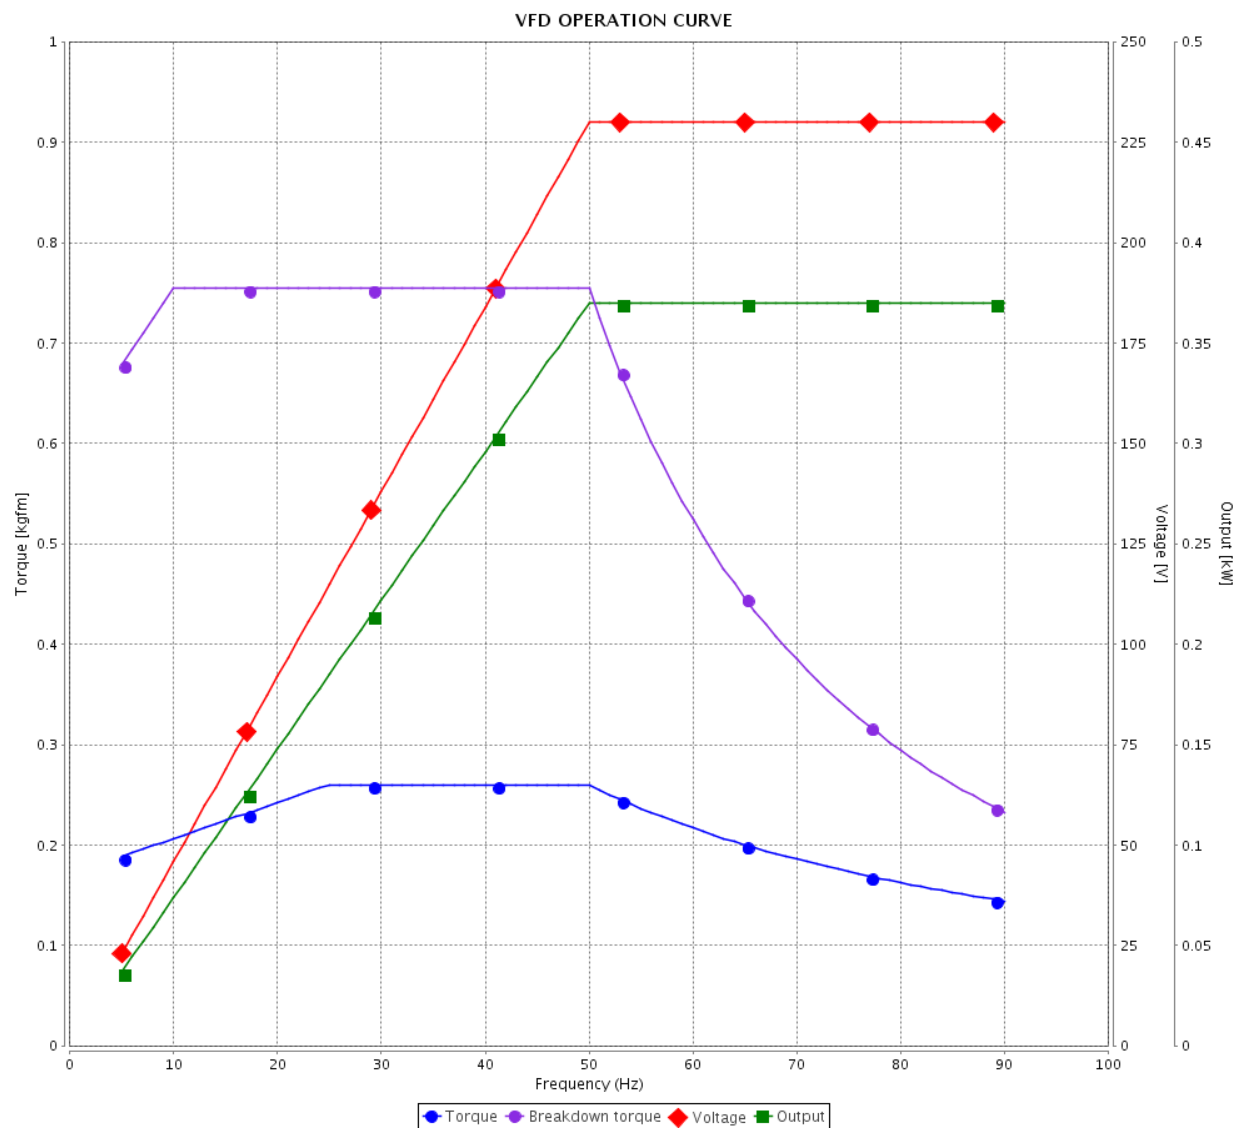

Performance : 230/400 V 50 Hz 4P

Rated current : 1.72/0.987 A
 LRC : 4.8
 Rated torque : 0.260 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 290 %
 Rated speed : 1385 rpm

Moment of inertia (J) : 0.0008 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					